

# A New Energy Efficient Clustering-based Protocol for Heterogeneous Wireless Sensor Networks

Nuray AT\* and Daraghma SM

Department of Electrical and Electronics Engineering, Anadolu University, Turkey

## Abstract

Energy efficiency is one of the most important design goals for wireless sensor networks (WSNs). To this effect, clustering is mostly used to prolong the lifetime of WSNs. In this study, we propose a new energy efficient (EE) clustering-based protocol for single-hop, heterogeneous WSNs. The proposed protocol uses channel state information (CSI) in the selection process of Cluster Heads (CHs). It is shown through simulations in MATLAB that the proposed protocol has 1.62 to 1.89 times better stability period than that of a well-known protocols including LEACH, DEEC, and SEP.

**Keywords:** Wireless sensor network, Sensor node, Clustering, Routing protocols, Residual energy, Energy efficient routing, Network lifetime

## Introduction

Sensor networks can contain hundreds to thousands sensing nodes. It is desirable to make these nodes as cheap and energy-efficient as possible and rely on their large numbers to obtain high quality results. Wireless Sensor Networks (WSNs) are used for a variety of tasks including detection, localization and tracking objects of interest. In [1], an accurate estimate of a source location is obtained by using energy readings of sensors.

One challenge faced by WSNs is the power management issue. As sensors have limited energy, it needs to be used wisely so that a WSN has a long lifetime. Clustering [2-4] is one of the successful techniques to improve the lifetime of a WSN. In this approach, a network field is divided into sub regions, called clusters. Each cluster has a Cluster Head (CH) which is responsible for collecting data from member nodes within its cluster and transmitting the data to the Base Station (BS). However, this technique comes with its own problems such as deciding the number of clusters and CH to member ratio, selection and rotation process of CH(s).

Most of the analytical results in the literature assume that all sensor nodes in the network have equal energy. These networks are called homogeneous networks. In some cases on the other hand, some nodes in the network have different energies. For example, as the lifetime of a sensor network is limited there is a need to re-energize the network by adding more nodes. These nodes will be equipped with more energy than nodes that are already in use which will create heterogeneity in the network resulting heterogeneous networks [5].

The communications between entities on a network are governed by protocols. Network protocols must be designed to achieve fault tolerance in the presence of individual node failure(s) and to minimize energy consumption. Moreover, since the limited wireless channel bandwidth is shared among all sensors in the network, routing protocols should be able to perform a local collaboration to reduce bandwidth requirements.

A protocol called LEACH (Low-Energy Adaptive Clustering Hierarchy) was developed in [6,7]. It is a clustering-based protocol that minimizes energy dissipation in a sensor network. It is shown that LEACH outperforms classical clustering algorithms since it uses adaptive clusters, rotates CHs, and allows energy requirements of the

system to be distributed among all sensors in the network. But then, when aCH dies in LEACH that cluster will become useless since data gathered at the CH will never reach to the base station.

In this study, we assume that the BS is not energy limited, the dimensions of the field and the coordinates of the BS are known. We propose a new clustering-based energy-efficient (EE) protocol for single-hop, heterogeneous WSNs. In EE-Heterogeneous LEACH, CHs are selected by using weighted probabilities. These weighted probabilities are evaluated based on the ratio between residual energy and the best channel of each node and average energy of the network. The rotating epoch (time interval) for each node is different according to its initial and residual energy. Nodes with high initial and residual energy will be more likely to become CHs per round per epoch. CHs collect data from member nodes in their respective clusters, aggregate the received data and send it to the BS using single-hop communication. Simulation results show that the proposed protocol extends network lifetime and improves energy consumption compared to other well-known protocols including LEACH, DEEC, and SEP.

The outline of the paper is as follows. In Section 2, the previous work on the subject is summarized. The proposed protocol is presented in Section 3 and its performance is evaluated through simulations via MATLAB in Section 4. Some concluding remarks are given in Section 5.

## Previous Work

Single-hop dynamic clustering protocols like LEACH [8] suffer from the problem of cluster head rotation overhead in each round. LEACH elects cluster heads based on randomly generated value between 0 and 1. If this randomly generated value is less than the threshold value  $T(s)$  is given in (10) then the node become cluster head for the current round. Advanced LEACH [9] tries to improve the performance of LEACH by selecting best suited node for cluster

\*Corresponding author: Nuray AT, Department of Electrical and Electronics Engineering, Anadolu University, Turkey, Tel: +90 222 335 0580; E-mail: [nat@anadolu.edu.tr](mailto:nat@anadolu.edu.tr)

Received August 13, 2015; Accepted September 21, 2015; Published October 25, 2015

Citation: Nuray AT, Daraghma SM (2015) A New Energy Efficient Clustering-based Protocol for Heterogeneous Wireless Sensor Networks. J Electr Electron Syst 4: 161. doi:10.4172/2332-0796.1000161

Copyright: © 2015 Nuray AT, et al. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

head and improves the threshold equation of LEACH by introducing two terms: General Probability (GP) and Current State Probability (CSP). In ALEACH, nodes make autonomous decision without any central intervention taking into account residual energy. In reference [10], an energy-efficient hierarchical clustering algorithm (EEHCA) is proposed for WSNs. The EEHCA adopts a new method for CH selection along with the concept of backup CHs to improve the performance of the WSNs. Furthermore, when the CHs have finished the data aggregation, the head clusters transmit aggregated data to the BS node by a multi-hop communication approach. It is shown that the EEHCA achieves a good performance in terms of network life time by minimizing energy consumption for communication and balancing the energy load among all the nodes. Re-cluster-LEACH [11] protocol is based on nodes density, which considers the density of nodes inside the cluster for Cluster Head formation. LEACH-F [12] is an algorithm in which the number of clusters will be fixed throughout the network life time and the cluster heads are rotated within its clusters. Steady state phase of LEACH-F is identical to that of LEACH. LEACH-B [13] is a decentralized algorithm in which a sensor node only knows about its own position and position of final receiver and not the position of all sensor nodes. E-LEACH [14] provides improvement in selection of cluster heads of LEACH protocol. It uses residual energy of the nodes as the main factor whether these sensor nodes turn into the cluster head or not in the next round. LEACH-HPR [15] is an energy efficient cluster head election method and using the improved Prim algorithm to construct an inter-cluster routing in the heterogeneous WSN.

## System Model

In this study, we use a radio energy dissipation model given in Figure 1. Here, L bit data packets are transmitted to a receiver (Rx) located at a distance d from the transmitter (Tx).  $E_{elec}$  is the amount of energy needed in Tx or Rx hardware to send or receive data. Due to path loss and multipath fading phenomena that occur in wireless channels, Tx is equipped with an amplifier. The amplifier has a gain of where denotes the path loss exponent. Note that the value of the path loss exponent is between 2 and 4 in general.

To transmit L-bit message to a distance d:

$$E_{Tx}(L, d) = \begin{cases} LE_{elec} + L\epsilon_{fs}d^2, & d \leq d_0 \\ LE_{elec} + L\epsilon_{mp}d^4, & d \geq d_0 \end{cases} \quad (1)$$

where is the amplifier energy per bit per square meter ( $m^2$ ) when free space model is used for the channel and is the amplifier energy per bit per  $m^4$  when multipath propagation model is used. The threshold distance  $d_0$  in (1) is given by

$$d_0 = \sqrt{\frac{\epsilon_{fs}}{\epsilon_{mp}}}$$

and is set to 87 m in this study. Similarly, at the Rx side:

$$E_{Rx} = LE_{elec} \quad (2)$$

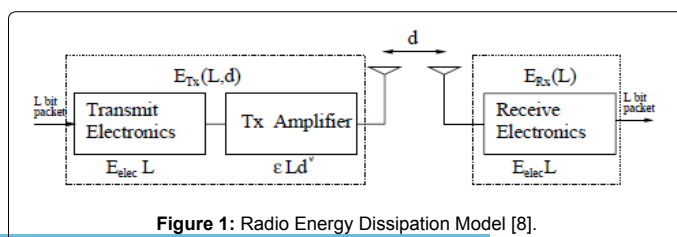


Figure 1: Radio Energy Dissipation Model [8].

Since transmitting a message is a costly operation in wireless channels, protocols used in WSNs should try to minimize not only the transmit distances but also the number of transmit and receive operations for each message.

## Optimal clustering

We assume that N nodes are uniformly distributed over a square field (D x D). The square field has an area of  $D^2$  square meters and the BS is located at the center of the field for simplicity. The field is divided into  $K_{sub}$  regions, clusters. For each cluster, one node is assigned as the cluster head. During transmission, each non-cluster head (non-CH) node sends L bit data to the CH node within its cluster. Thus, the energy used by a non-CH node is [16]:

$$E_{non-CH} = LE_{elec} + L\epsilon_{fs}d_{CH}^2 \quad (3)$$

where is the average distance between a cluster member and its corresponding CH [17]

$$d_{CH}^2 = \frac{D^2}{2\pi K}$$

Similarly, the energy dissipated in aCH is given by

$$E_{CH} = \left(\frac{N}{K} - 1\right)LE_{elec} + \frac{N}{K}LE_{DA} + LE_{elec} + L\epsilon_{fs}d_{BS}^2 \quad (4)$$

where is the data aggregation processing cost and is the average distance between a CH and the BS given by [16]:

$$d_{BS} = 0.765 \frac{D}{2}$$

The total energy dissipated during one round is

$$E_{round} = L(2NE_{elec} + NE_{DA} + \epsilon_{fs}(Kd_{BS}^2 + Nd_{CH}^2)) \quad (5)$$

By differentiating with respect to and equating to zero, the optimal number of clusters is found to be [16,17]:

$$K_{opt} = \sqrt{\frac{N}{2\pi}} \frac{D}{d_{BS}} = \sqrt{\frac{N}{2\pi}} \frac{2}{0.765} \quad (6)$$

If a significant percentage of nodes are farther away from the BS (a distance greater than  $d_0$ ), then the optimal number of clusters is given by [16]

$$K_{opt} = \sqrt{\frac{N}{2\pi}} \sqrt{\frac{\epsilon_{fs}D}{\epsilon_{mp}d_{BS}^2}} \quad (7)$$

The optimal probability of a node being selected as a CH is computed as [16]

$$p_{opt} = \frac{K_{opt}}{N} = \frac{1}{0.765} \sqrt{\frac{2}{N\pi}} \sqrt{\frac{\epsilon_{fs}}{\epsilon_{mp}}} \quad (8)$$

The quantity plays an important role in the operations of WSNs. If the clusters are not constructed in an optimal way, the total energy consumed during a round will increase in a nonlinear fashion [17,18].

## Proposed protocol

Like LEACH, our proposed protocol also consists of two phases (1) Setup Phase and (2) Steady Phase.

During the Setup Phase, the BS broadcasts a message at a certain power containing its identification information. This message makes each node aware of the BS. The BS decides the number of and optimal

size of clusters depending upon the size of a network area and density of nodes. The BS then sends control packets to each node informing about the protocol to be used. These control packets consist of all necessary information required for steady state working of the protocol including threshold energy value for a CH change, TDMA slots for intra-cluster communication, CDMA code for communication with the BS along with node identities. This makes each node aware of the other members of its cluster, current round CH, CH rotation sequence, sleep and wake-up patterns to reduce collision and to save energy. Threshold energy is the least amount of energy to have for a CH node [19].

During the Steady Phase, non-CH nodes collect data and send to its CH (inter-cluster communication). Similarly, each CH sends data to the BS (intra-cluster communication). After each round, a CH checks its remaining energy to see if it is reached to the threshold value ( $E_{th}$ ) for a CH change. If so, it generates a beep signal and lets its cluster members know a CH is about to change. Thereafter, it behaves like a non-CH node, i.e., it collects data and sends to the new CH. The process of CH rotation continues till each node within the cluster gets a chance to be a CH. After the last node is reached to the threshold value, the algorithm starts over and runs the same CH schedule.

In short,

1. The BS is fixed (not mobile) and located far from sensor nodes.
2. All sensor nodes in the network are uniformly distributed over a square field.
3. Sensor nodes and the BS are left unattended after their deployment.
4. A network consists of heterogeneous nodes in terms of energy.
5. All sensor nodes are of equal significances.
6. The BS has a rechargeable battery.

LEACH is an iterative algorithm and each iteration in the algorithm is called a 'round'. The round  $r$  is referred to a time interval where all cluster members transmit to the CH. In LEACH, during the setup phase, each node generates a random number between 0 and 1. If this random number is less than a specific value, the threshold value  $T(s)$ , then the node becomes a CH for that round. The threshold value is chosen as:

$$T(s) = \begin{cases} \frac{P_{opt}}{1 - P_{opt}} \left( r \bmod \left( \frac{1}{P_{opt}} \right) \right), & \text{if } s \in G \\ 0, & \text{otherwise} \end{cases} \quad (10)$$

where  $s$  is the desired percentage of CHs among all nodes,  $r$  is the current round number,  $G$  is a set of sensor nodes that have not been selected as CHs in the last  $\left( \frac{1}{P_{opt}} \right)$  rounds, and  $s$  is the current CH node.

Most energy-efficient schemes in the literature aim at minimizing the average wasted energy. To this affect, they only take into account the residual energy. On the other hand, other energy-efficient schemes focus on minimizing the average transmission energy and take into account the CSI. It is a well-known fact that network lifetime depends on both the average wasted energy and the average transmission energy. Since the ultimate goal is to maximize the network lifetime, one needs to balance the both schemes. In this study, we consider the case where the CSI is available [20].

The received signal at the BS due to the CH is:

$$y_{iBS}(n) = \sqrt{P_i} h_{iBS}(n) x_i(n) + \eta_{iBS}(n) \quad (11)$$

where  $P_i$  is the transmission power of the CH node  $i$ ,  $h_{iBS}(n)$  is the channel gain between the CH node  $i$  and the BS (circularly-symmetric Gaussian random variable with zero mean and variance), and  $x_i(n)$  is the M-PSK modulated transmitted signal ( $M=2k$  with  $k$  positive integer) with unit average power, and  $\eta_{iBS}(n)$  is an additive noise term, circularly-symmetric Gaussian random variable with zero mean. The variance of  $\eta_{iBS}(n)$  is given by

$$\sigma_{iBS}^2 = \beta D_{iBS}^{-\alpha} \quad (12)$$

where  $D_{iBS}$  is the distance between CH node  $i$  and the BS,  $\alpha$  is the path loss exponent, and  $\beta$  is a constant whose value depends on the propagation environment [21].

We propose a new threshold value  $T(s)$ , an improvement to (10), as follows:

$$T(s) = \begin{cases} \frac{P_{opt}}{1 - p_{opt}} \left( r \bmod \left( \frac{1}{P_{opt}} \right) \right) \left( \frac{E_{MRE} E_{bestchannel}}{E_{av}} \right) \end{cases} \quad (13)$$

where  $E_{MRE}$  denotes the maximum of minimum residual energies,  $E_{bestchannel}$  is the largest variance (or, energy) of channel gains, and  $E_{av}$  is the average energy of the network.

The average energy of the network at the  $r$ th round is given by

$$E_{av}(r) = \frac{1}{N} E \left( 1 - \frac{r}{R} \right) \quad (14)$$

where  $R$  is the network lifetime, which assumes that every node consumes the same amount of energy in each round. Suppose also that all nodes die at the same time; hence,  $R$  is the total number of rounds in which the network is alive. Let denote the energy consumed by the WSN in each round. Then  $R$  is given by

$$R = \frac{E_{total}}{E_{round}} \quad (15)$$

In this study, we consider a WSN that uses a single-hop communication. An illustrative example of a single-hop communication with four clusters is depicted in Figure 2 where each non-CH node communicates directly (single-hop) with its CH and each CH communicates directly with the BS.

The data retrieval operation is initiated by the BS which broadcasts the request to send (RTS) message to activate sensors. CHs are enabled

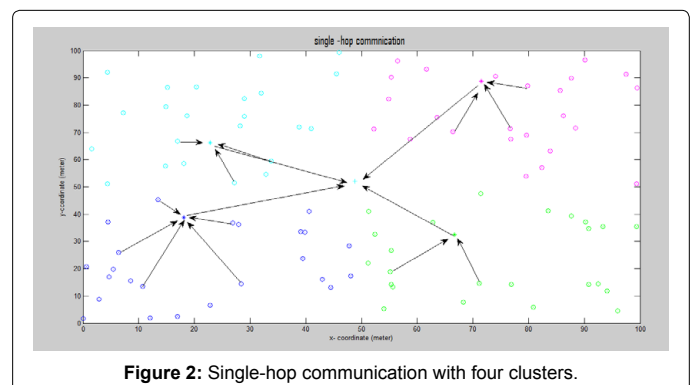


Figure 2: Single-hop communication with four clusters.

and data packets are transmitted to the BS through the wireless channel. All sensor nodes that have received RTS will contend for the data channel according to the non-cooperative schemes presented in [20]. At any time instant, only one CH occupies the channel to transmit a data packet to the BS. When one transmission is being held, other CH nodes in the network are in a sleeping state.

The average BER performance for a non-cooperative node with M-PSK modulation is upper-bounded by [22]:

$$BER \leq \frac{AN_0}{bP_i\sigma_{iBS}^2 \log_2 M} \quad (16)$$

where  $N_0$  is the power spectral density of the additive noise term,  $A$  and  $b$  are defined as

$$A = \frac{(M-1)}{2M} + \sin\left(\frac{2\pi}{4M}\right), \quad b = \sin^2\left(\frac{\pi}{M}\right) \quad (17)$$

If the average BER is required to be less than or equal to a given value  $\zeta$ , that is,  $BER_{iBS} \leq \zeta$ , the minimum transmission power is

$$P_{\min} = \frac{AN_0}{b\zeta\sigma_{iBS}^2 \log_2 M}$$

Thus  $P_i \in [P_{\min}, P_{\max}]$ , where  $P_{\max}$  denotes the maximum transmission power.

## Simulation Results

The performance of the proposed clustering-based protocol is evaluated using MATLAB both for homogeneous and heterogeneous networks. In the network, 100 nodes are randomly deployed in a 100 m × 100 m region where the BS is located at the center as illustrated in Figure 3.

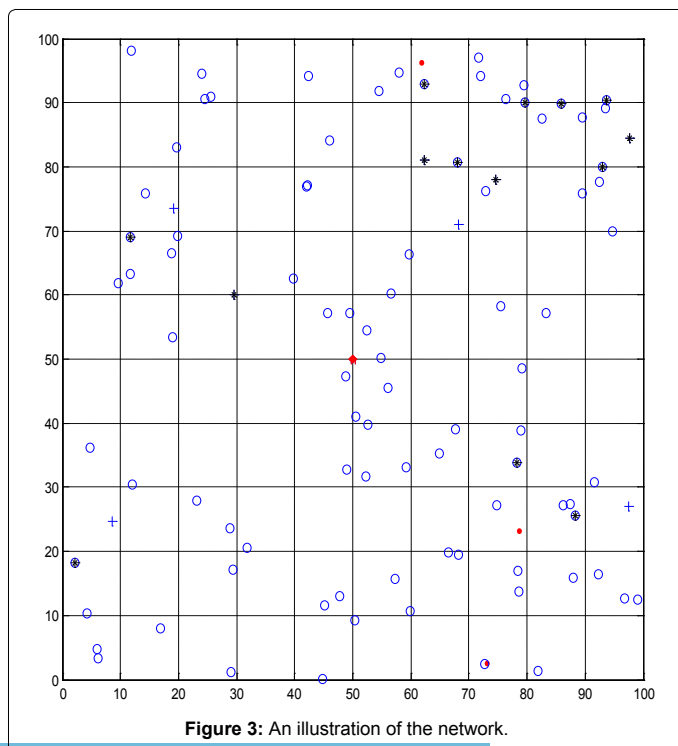


Figure 3: An illustration of the network.

Parameter name	Value
$E_0$	0.5 J
Packet size	4000 bits
$E_{elec}$	50 nJ/bit
$E_{tx} = E_{rx}$	50 nJ/bit
$E_{fs}$	10 pJ/bits/m <sup>2</sup>
$E_{mp}$	0.0013 pJ/bits/m <sup>2</sup>
$E_{DA}$	5 nJ
$F_c$	1 GH
$N_0$	-40 dBm
BER	$10^{-3}$
$\eta$	1
$\alpha$	2
$P_{max}$	0.2
Data rate R	$10^4$
Modulation type	BPSK
$E_c$	$2 \times 10^{-4}$
$E_{cs}$	$2 \times 10^{-4}$
$E_{cs}$	$10^{-4}$

Table 1: Network model parameters.

The performance evaluation of the proposed network is done with respect to the following parameters:

**Stability period:** The time interval between the start of the network operation and the death of the first sensor node also known as stable region.

**Instability period:** The time interval between the death of the first sensor node and of the last sensor node.

**Network lifetime:** The time interval between the start of the network operation and the death of the last sensor node.

**Number of alive nodes:** The number of sensor nodes that have not yet depleted their energy.

**Number of dead nodes:** The number of sensor nodes that have consumed all of their energy and are not able to do any kind of functionality [22-24].

**Throughput:** The rate of data sent from cluster heads to the base station.

The proposed algorithm is compared with LEACH, DEEC, and SEP in terms of dead and alive nodes per round, energy consumption of the network, and overall throughput. The total number of rounds used in our experiments is 8000.

Network model parameters are summarized in Table 1.

Figure 4 shows the number of dead nodes per round indicating stability time of the networks. The death of the first node occurs at the round 1270 in the proposed protocol whereas the death of the first node occurs at rounds 984, 1140, and 912 in LEACH, DEEC, and SEP, respectively. The death of the last node occurs at the round 2529 in the proposed protocol whereas the death of the last node occurs at rounds 1450, 1554, and 2115 in LEACH, DEEC and SEP, respectively. Hence, the proposed protocol has better stability time and network lifetime as compared to the other networks.

The proposed protocol has also better energy consumption and higher throughput than the other protocols considered which can

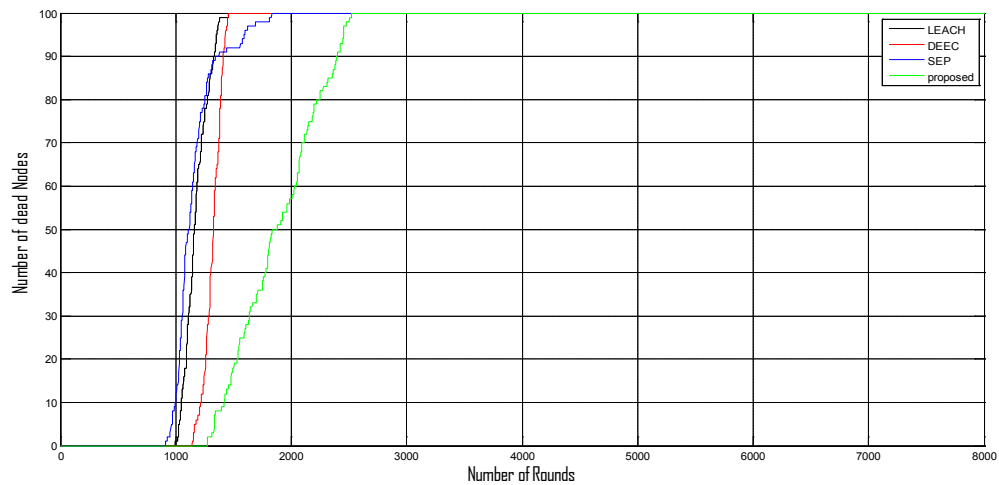


Figure 4: Number of dead no desper round.

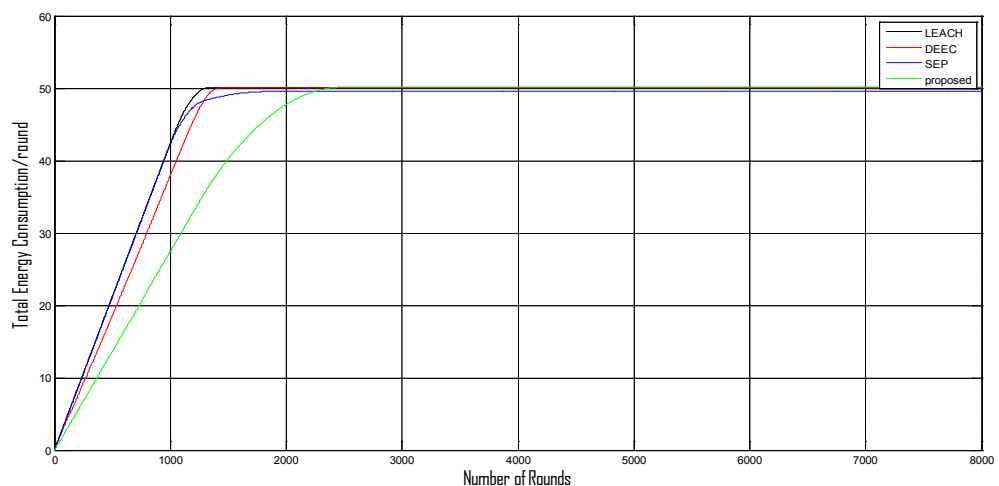


Figure 5: Energy consumption.

be seen from the Figures 5 and 6. Initial energy  $E_0$  of the network is consumed at the round 2100 in the proposed protocol whereas the initial energy  $E_0$  of the network is consumed at rounds 1100, 1200 and 1300 in LEACH, DEEC and SEP, respectively (Figure 5). Similarly, Figure 6 shows the superiority of the proposed algorithm in terms of the throughput thanks to the wiser selection of CHs [25].

Here all nodes have different amount of initial energies. The initial energies are uniformly distributed on  $[0.5, 1]$  resulting the average initial energy of 0.75 J. Several experiments are conducted, the average stability periods are calculated, and the results are shown in Figures 7-9. The results show that on the average the proposed algorithm has 1.62 to 1.89 times better stability period compared to other protocols considered. Figure 7 shows the number of dead nodes per round indicating stability time of the networks. The death of the first node occurs at the round 1894 in the proposed protocol whereas the death of the first node occurs at rounds 1036, 1322, and 1243 in LEACH, DEEC, and SEP, respectively. Hence, the proposed protocol has better stability time and network lifetime as compared to the other networks. The proposed protocol has also better energy consumption and higher




throughput than the other protocols considered which can be seen from the Figures 8 and 9.

## Conclusions

This paper presents a new clustering-based protocol, EE-Heterogeneous LEACH, for WSNs. In the proposed protocol, nodes with different energy levels are considered causing heterogeneity in the network. Moreover, a single-hop transmission approach is adopted for intra-cluster and inter-cluster communication. We proposed an optimized routing scheme where the main focus is to enhance cluster head selection process. CHs are selected in each cluster on the basis of residual node energy and the best channel.

From the conducted experiments, it is seen that:

Stability period of the network is enhanced compared to the other protocols LEACH, DEEC, and SEP. Superior network lifetime is obtained for different scenarios. Last but not least, the throughput of the proposed protocol is significantly better than the other protocols

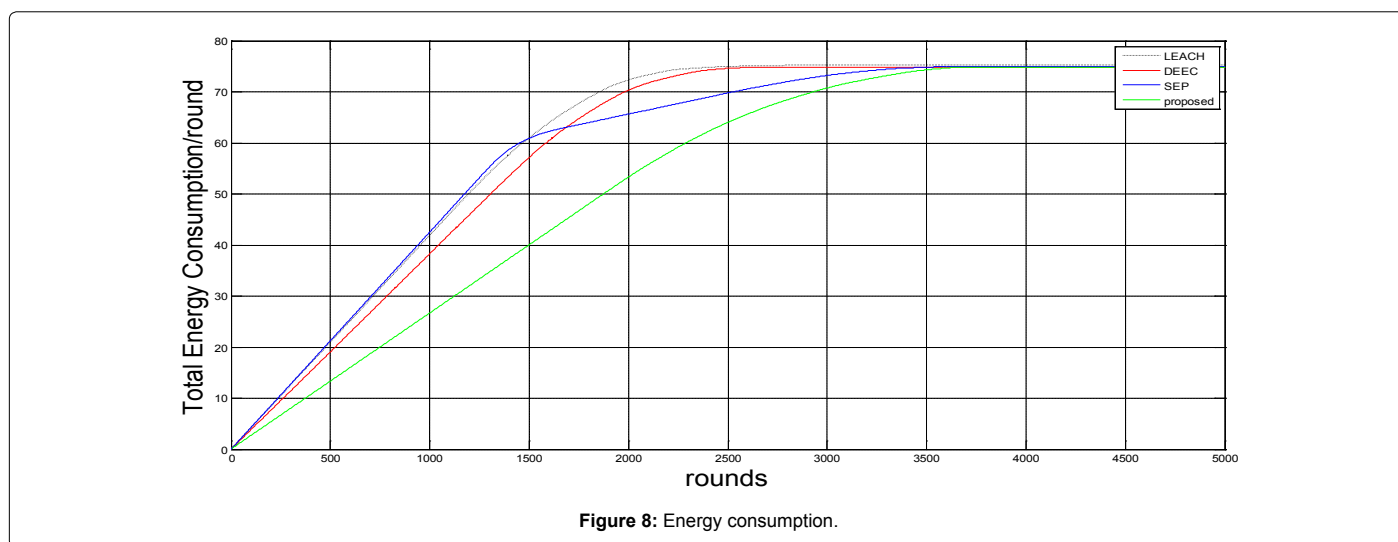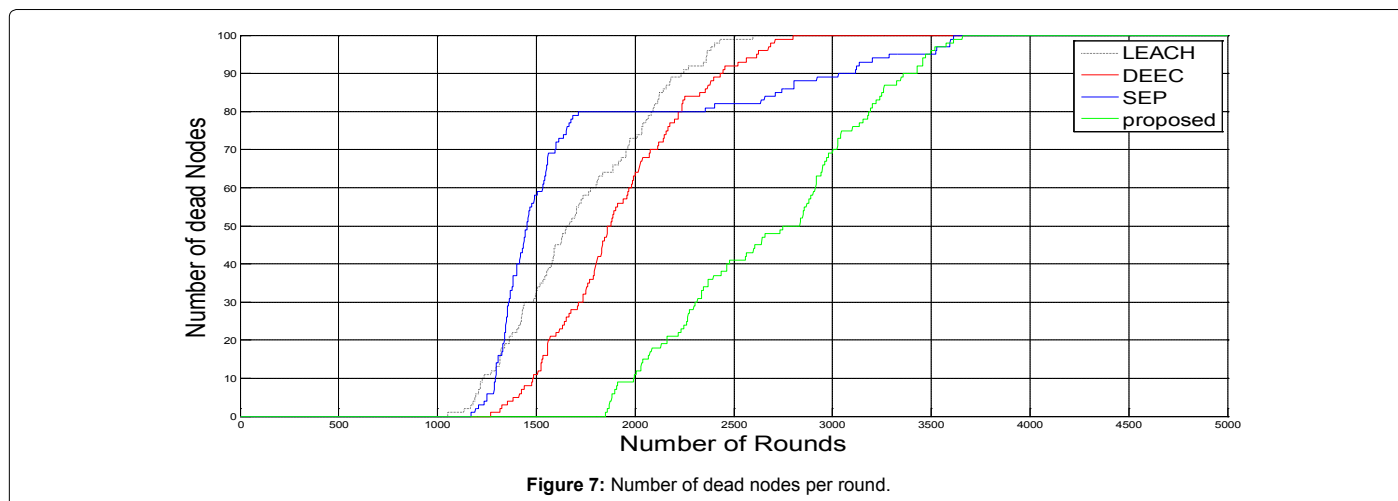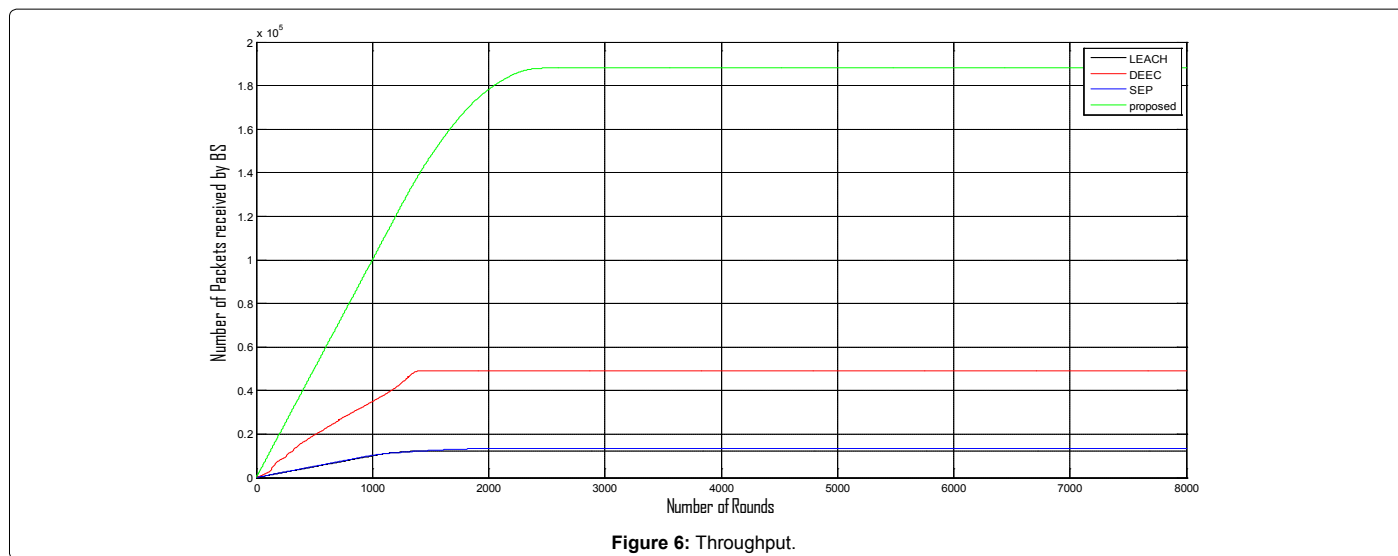

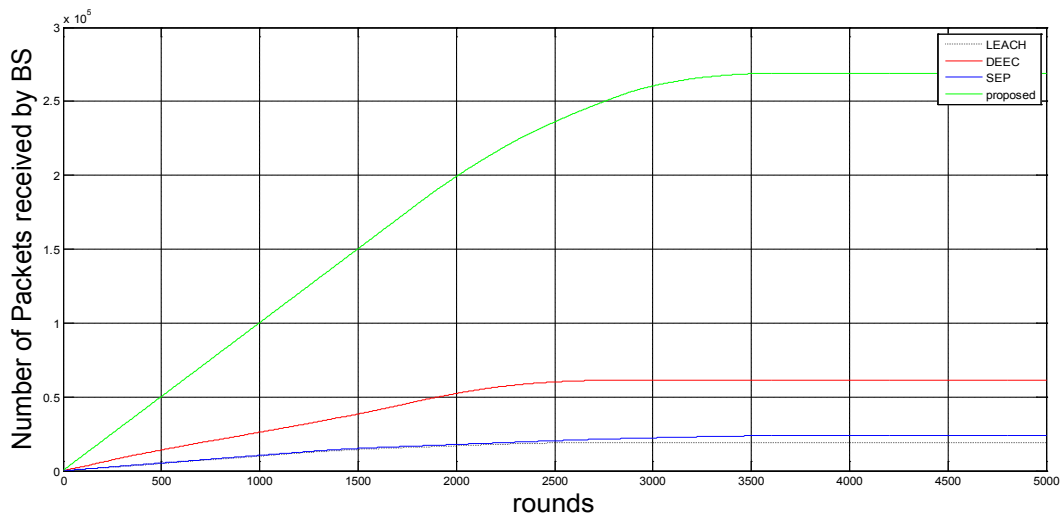


Figure 9: Throughput.

considered. Thus, we claim that the proposed protocol has improved energy efficiency and effective in prolonging the network lifetime.

#### References

- Kumar V, Jain S, Tiwari S (2011) Energy Efficient Clustering Algorithm in Wireless Sensor Networks A survey, IJCSI International Journal of Computer Science 8.
- Kumar P, Singh MP (2010) A New Clustering Protocol Based on Energy Band for Wireless Sensor Network, International Journal of Information Technology and Knowledge Management 3.
- Lee D, Kaliappan VK, Duckwon C, Dugki M (2008) An energy efficient dynamic routing scheme for clustered sensor network using a ubiquitous robot Research, Innovation and Vision for the Future, IEEE International Conference 198-203.
- Chang YC, Lin ZS, Chen JL (2006) Cluster based self-organization management protocols for wireless sensor networks, In Proceeding of the IEEE transaction on consumer electronic 52: 75-80.
- Mhatre V, Rosenberg C (2004) Homogenous vs. heterogenous clustered sensor networks: A comparative study, in Preceedings of 2004 IEEE, International Conference on Communications.
- Heinzelman W, Chandrakasan A, Balakrishnan H (2002) Application specific protocol architecture for wireless sensor networks, IEEE Transaction on wireless Networking 660-670.
- Amanjeet P, Nitin M, Singh DP, Chauhan RS (2010) Improved Leach communication protocol for WSN, National Conference on Computational Instrumentation CSIO Chandigarh 177-181.
- Heinzelman W, Chandrakasan A, Balakrishnan H (2002) Energy-efficient communication protocol for wireless sensor networks, in the proceeding of the Hawaii International Conference System Science, Hawaii.
- Ali MS, Dey T, Biswas R (2008) ALEACH: Advanced LEACH Routing Protocol for Wireless Microsensor Networks, 5<sup>th</sup> International Conference on Electrical and Computer Engineering Conference on Electrical and Computer Engineering ICECE 909-914.
- Xin G, Yang WH, Gang DD (2008) EEHCA: an energy-efficient clustering algorithm for wireless sensor network, Inf Technol 7: 245-252.
- Yi G, Guiling S, Weixiang L, Yong P (2009) Recluster-LEACH: A recluster control algorithm based on density for wireless sensor network, 2<sup>nd</sup> International Conference on Power Electronics and Intelligent Transportation System 3: 198-202.
- Heinzelman WB (2000) Application-Specific Protocol Architectures for Wireless Networks, PhD thesis, Massachusetts Institute of Technology.
- Depedri A, Zanella A, Verdona R (2003) An Energy Efficient Protocol for Wireless Sensor Networks In Proc. AINS 1-6.
- Fan X, Song Y (2007) Improvement on leach protocol of wireless sensor network, In Proceeding of the International Conference on Sensor Technologies and Applications 260-264.
- Han L (2010) LEACH-HIR: An energy efficient routing algorithm for Heterogenous WSN, IEEE International Conference on Intelligent Computing and Intelligent Systems (ICIS) 2: 507-511.
- Kumar D, Aseri TC, Patel RB (2009) EEHC: energy efficient heterogeneous clustered scheme for wireless sensor networks, Elsevier Comput Commun 32: 662-667.
- Smaragdakis G, Matta I, Bestavros A (2004) SEP: a stable election protocol for clustered heterogeneous wireless sensor networks, Proc.Int Workshop Sensor and Actor Network Protocols and Applications, Boston, MA 251-261.
- Xianguo F, Yulin S (2007) Improvement on LEACH protocol of wireless sensor networks, Proc.Int.Conf. Sensor Technologies and Applications 260-264.
- Sharma N, Verma V (2013) Heterogeneous LEACH Protocol for Wireless Sensor Networks, Int J Advanced Networking and Applications 1825-1829.
- Chen Y, Zhao Q (2005) Maximizing the lifetime of sensor network using local information on channel state and residual energy, in Proc. IEEE CISS'05.
- Himsoon T, Siriwongpairat WP, Han Z, Liu KJR (2007) Lifetime maximization via cooperative nodes and relay deployment in wireless networks, IEEE J Select. Areas Commun 25: 306-317.
- Su W, Sadek AK, Liu KJR (2005) SER performance analysis and optimum power allocation for decode-and-forward cooperation protocol in wireless networks, in Proc. IEEE WCN'05 2: 984-989.
- Heinzelman W, Chandrakasan A, Balakrishnan H (2000) Energy-Efficient Routing Protocols for Wireless Microsensor Networks, Proceeding of 33<sup>rd</sup> Hawaii International Conference System Science, Maui 4-7.
- Qing L, Zhu Q, Wang M (2006) Design of a distributed energy-efficient clustering algorithm for heterogenous wireless sensor networks, Computer, Comm 29: 2230-2237.
- Smaragdakis G, Matta IA (2004) SEP: A Stable Election Protocol for Clustered Heterogeneous Wireless Sensor Networks, Proceeding of SANPA.