

Modern Web Development

Understanding domains,
technologies, and user experience



 Professional

Dino Esposito

Modern Web Development: Understanding domains, technologies, and user experience

Dino Esposito



PUBLISHED BY
Microsoft Press
A division of Microsoft Corporation
One Microsoft Way
Redmond, Washington 98052-6399

Copyright © 2016 by Dino Esposito

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the written permission of the publisher.

Library of Congress Control Number: 2015934865
ISBN: 978-1-5093-0001-3

Printed and bound in the United States of America.

First Printing

Microsoft Press books are available through booksellers and distributors worldwide. If you need support related to this book, email Microsoft Press Support at mspinput@microsoft.com. Please tell us what you think of this book at <http://aka.ms/tellpress>.

This book is provided “as-is” and expresses the author’s views and opinions. The views, opinions and information expressed in this book, including URL and other Internet website references, may change without notice.

Some examples depicted herein are provided for illustration only and are fictitious. No real association or connection is intended or should be inferred.

Microsoft and the trademarks listed at <http://www.microsoft.com> on the “Trademarks” webpage are trademarks of the Microsoft group of companies. All other marks are property of their respective owners.

Acquisitions and Developmental Editor: Devon Musgrave

Project Editor: Steve Sagman

Editorial Production: Waypoint Press

Technical Reviewer: Marc Young

Copyeditor: Roger LeBlanc

Indexer: Toni Culley

Cover: Twist Creative • Seattle and Joel Panchot



To my wife Silvia.

You make me feel sandy like a clepsydra. I get empty and filled all the time; but it's such a thin kind of sand that even when I'm full, without you, I just feel empty.

—DINO



Contents at a glance

PART I	UNDERSTANDING THE DOMAIN	
CHAPTER 1	Conducting a thorough domain analysis	3
CHAPTER 2	Selecting the supporting architecture	19
CHAPTER 3	UX-driven design	47
CHAPTER 4	Architectural options for a web solution	63
CHAPTER 5	The layered architecture	87
PART II	DEVELOPMENT	
CHAPTER 6	ASP.NET state of the art	103
CHAPTER 7	Whys, wherefores, and technical aspects of ASP.NET Core 1.0	109
CHAPTER 8	Core of ASP.NET MVC	133
CHAPTER 9	Core of Bootstrap	171
CHAPTER 10	Organizing the ASP.NET MVC project	217
CHAPTER 11	Presenting data	247
CHAPTER 12	Editing data	279
CHAPTER 13	Persistence and modeling	313
PART III	USER EXPERIENCE	
CHAPTER 14	Creating more interactive views	335
CHAPTER 15	Pros and cons of responsive design	365
CHAPTER 16	Making websites mobile-friendly	381



Contents

Introduction xvii

PART I UNDERSTANDING THE DOMAIN

Chapter 1 Conducting a thorough domain analysis 3

Domain-driven design to the rescue.....	4
Introducing design driven by the domain.....	4
Clearing up common misconceptions about DDD	4
Introducing the ubiquitous language.....	6
Creating a vocabulary of domain-specific terms.....	6
Keeping business and code in sync	8
Introducing the bounded context.....	10
Discovering bounded contexts.....	10
Implementing bounded contexts.....	12
Introducing context mapping.....	15
Examining relationships between bounded contexts.....	15
Introducing event storming.....	17
Having unlimited modeling space.....	17
Finding events in the domain.....	17
Leading the discussion.....	18
Summary.....	18

What do you think of this book? We want to hear from you!

Microsoft is interested in hearing your feedback so we can improve our books and learning resources for you. To participate in a brief survey, please visit:

<http://aka.ms/tellpress>

Chapter 2	Selecting the supporting architecture	19
	It's all about business logic	19
	Examining the application logic	20
	Examining the domain logic	21
	Exploring patterns for the business logic	22
	Using a single model	24
	Exploring the elements of an object-oriented domain model	24
	Putting business rules inside	26
	Discovering aggregates	28
	Exploring the role of domain services	30
	Implementing command and query separation	32
	Working with the Command and Query Separation principle	33
	Implementing CQRS	36
	Introducing message-based formulation	39
	Ad-hoc infrastructure	39
	Introducing event sourcing	43
	Summary	46
Chapter 3	UX-driven design	47
	Why a top-down approach is better than a bottom-up one	48
	Foundation of the bottom-up approach	48
	Planning with a top-down approach	50
	Looking at user experience from an architectural perspective	52
	UX is not UI	52
	Explaining UXDD in three steps	55
	Why UXDD is beneficial to nearly everybody	59
	Summary	62
Chapter 4	Architectural options for a web solution	63
	Assessing the available web solutions	64
	Deciding on the best framework	64
	Laying out a solution	65



Examining the role of ASP.NET Core 1.0	66
Considering ASP.NET as the starting point	66
Examining the architectural dependencies in ASP.NET Core 1.0	68
Exploring the reasons to choose ASP.NET Core 1.0	69
Determining if you should use ASP.NET Web Forms	72
Examining a common scenario	72
ASP.NET Web Forms at a glance	73
What's still good with Web Forms	73
Why you should move away from Web Forms	74
Determining if you should use ASP.NET MVC	76
ASP.NET MVC at a glance	76
What's good with ASP.NET MVC	77
Weak points of ASP.NET MVC	78
Examining the role of ASP.NET Web API	79
Moving from WCF to Web API	79
Comparing ASP.NET Web API and ASP.NET MVC	80
Talking about REST	82
Using Web API in ASP.NET Core 1.0	82
Single-page applications	83
Setting up a SPA	84
Hybrid SPA	84
Weak points of a SPA	85
Summary	85

Chapter 5 The layered architecture 87

Beyond classic three-tier systems	87
Working with a three-tier architecture today	88
Fifty shades of gray areas	89
The presentation layer	90
The user experience	90
The input model	91
The view model	92

Chapter 7	Whys, wherefores, and technical aspects of ASP.NET Core 1.0	109
	The background of ASP.NET Core	110
	The cost of a large memory footprint	110
	Reconsidering the cloud as the silver bullet	111
	Making the case for the necessity of a different programming model	111
	The impact on everyday work	112
	The ASP.NET Core runtime at a glance	113
	The DNX host	113
	Hosting web applications in DNX	115
	ASP.NET Core HTTP pipeline	116
	ASP.NET Core for ASP.NET developers	118
	Creating a new project	118
	Application startup	122
	Application settings	126
	Authentication	128
	Other aspects of web programming	129
	Summary	132
Chapter 8	Core of ASP.NET MVC	133
	Routing incoming requests	134
	Simulating the ASP.NET MVC runtime	134
	Exploring the URL routing HTTP module	137
	Using application routes	138
	Exploring the controller class	145
	Looking at aspects of a controller	145
	Writing controller classes	147
	Processing input data	152
	Manual parameter binding	152
	Model binding	153

Producing action results	158
Wrapping results	158
Returning HTML markup	160
Returning JSON content	167
Summary	169
Chapter 9 Core of Bootstrap	171
Bootstrap at a glance	171
LESS and the foundation of Bootstrap	172
Setting up Bootstrap	174
Putting Bootstrap into perspective	175
Responsive layouts	176
The grid system	176
Screen-based rendering	178
Taxonomy of today's web elements	183
Restyling basic HTML elements	183
Restyling list HTML elements	193
A look at more advanced components	196
Bootstrap extensions	202
Autocompletion	202
Date picking	209
Custom components	211
Summary	215
Chapter 10 Organizing the ASP.NET MVC project	217
Planning the project solution	217
Mapping projects to the Layered Architecture pattern	218
Application startup	220
Examining application services	225
Adding in other assets	227
Creating presentation layouts	228
Serving resources more effectively	231
Working with Bundling	231
Using minification	236



Examining other aspects	238
Exploring error handling.	238
Configuring user authentication	241
Summary.	246

Chapter 11 Presenting data 247

Structuring an HTML view.	247
Exploring the view model.	247
Examining the page layout.	250
Presenting the elements of a view	254
Displaying a list of data items.	258
Creating a grid view.	258
Adding paging capabilities.	263
Adding scrolling capabilities to page elements	268
Adding a detail view.	271
Popover views.	271
Drill-down views.	274
Summary.	277

Chapter 12 Editing data 279

A common form for the login page	279
Presenting the form.	279
Processing posted data.	281
Input forms.	284
The Post-Redirect-Get pattern	284
Form validation.	286
Modal input forms.	296
Quick tips for improving the user experience	304
Using date pickers is great, but...	305
Using autocompletion instead of long drop-down lists	307
Miscellaneous tips for large input forms	310
Summary.	311

Chapter 13 Persistence and modeling 313

Examining the different flavors of a model	313
The persistence model	314
The domain model	315
The input model	317
The view model	318
Designing a persistence layer	319
Using an implicit and legacy data model	320
Using Entity Framework	322
The Repository pattern	326
Polyglot persistence	328
Polyglot persistence by example	329
Costs of polyglot persistence	330
Summary	332

PART III USER EXPERIENCE

Chapter 14 Creating more interactive views 335

Exposing JSON content	336
Creating JSON endpoints	336
Negotiating content	339
Solving the cross-origin puzzle	340
Designing a Web API	344
Purpose of the ASP.NET Web API	344
Web API in the context of ASP.NET MVC	345
Securing a standalone Web API	346
Pulling content	349
The Ajax core	349
The jQuery tools	351
Binding data to the current DOM	354
Pushing content to the client	357
ASP.NET SignalR at a glance	358
Monitoring remote tasks	359
Other scenarios for ASP.NET SignalR	362
Summary	363



Chapter 15 Pros and cons of responsive design 365

Foundation of Responsive Web Design	365
A brief history of RWD	366
CSS media queries	366
RWD and device independence	371
Adapting RWD to non-desktop devices	373
Dealing with images	374
Dealing with fonts	376
Dealing with orientation	378
Summary	379

Chapter 16 Making websites mobile-friendly 381

Adapting views to the actual device	381
The best of HTML5 for mobile scenarios	382
Feature detection	384
Client-side device detection	386
A look into the future	389
Device-friendly images	390
The ImageEngine platform	390
Resizing images automatically	391
Serving device-friendly views	392
What's the best way to offer mobile content?	392
Server-side detection	394
Summary	399
Index	401

What do you think of this book? We want to hear from you!

Microsoft is interested in hearing your feedback so we can improve our books and learning resources for you. To participate in a brief survey, please visit:

<http://aka.ms/tellpress>

Introduction

No later than the summer of 2008, I gave a few public talks about the future of the web. Customers who hired me at the time heard from this expert voice that the web of the (near) future would be significantly different than what it was looking like in 2008. At the time, the brilliant future of the web seemed to be in the hands of compiled code run from within the browser.

JavaScript? It's dead, at last! ASP.NET? It's gone, thankfully!

The future as I saw it back then (along with many other experts) had only rich-client technologies in store for millions of us. And Microsoft Silverlight stood at the center of the new web universe.

If you started hibernating in 2008 and woke up any time in the past three or even four years, you found a different world than I, or possibly you, had imagined. It was solidly server-side-based and different from what the expectations were. Today, you find a web world in which JavaScript reigns and, with it, a ton of ad hoc tools and frameworks.

Customers who paid good money to hear my expert voice back in 2008 tell them to invest in Silverlight are now paying good money to switch back more or less to where they were in 2008.

Well, not exactly.

This book comes at a weird time, but it's not a weird book. Two decades of web experience taught us that real revolutions happen when, mostly due to rare astral alignments, a bunch of people happen to have the same programming needs. So it was for Ajax, and so it is today for responsive and interactive front ends. JavaScript has been revived because it is the simplest way for programmers to achieve goals. And because it is still effective enough to make solutions easy to sell.

Planning a web solution today means having a solid server-side environment to serve rich and interactive HTML pages, styled with CSS and actioned by JavaScript. Even though a lot of new ad hoc technologies have been developed, the real sticking points with modern applications (which are for the most part web applications) are

domain analysis and the supporting architecture. Everything else revolves around the implementation of a few common practices for a few common tasks, some of which are relatively new requirements—for example, push notifications from the server.

In this book, you will find a summary of practices and techniques that guarantee effective solutions for your customers. The point today is no longer to use the latest release of the latest platform or framework. The point is just to give customers what they really want. Tools to build software exist; ideas and plans make the difference.

Who should read this book

This book exists to help web developers improve their skills. The inspiring principle for the book is that today we mostly write software to mirror a piece of the real world, rather than to bend the real world to a piece of technology.

If you just want to do your day-to-day job better, learning from the mistakes that others made and looking at the same mistakes you made with a more thoughtful perspective, then you should definitely read this book.

Assumptions

This book assumes you are familiar with the Microsoft web stack. This experience can range from having done years of Web Forms development to being a JavaScript angel. The main focus is ASP.NET MVC, because that will be the standard with ASP.NET Core and remain so for the future of the ASP.NET platform. Here are some key goals for readers of the book: learning a method general enough so that you can start development projects with a deep understanding of the domain of the problem, select the right approach, and go forward with reliable coding practices.

This book might not be for you if...

If you're looking for a step-by-step guide to some ASP.NET MVC or perhaps Bootstrap, this book is probably not the best option you have. It does cover basic aspects of both technologies, but it hardly does that with the necessary slow pace of a beginner book.

Organization of this book

The book is divided in three parts: understanding the business domain, implementing common features, and analyzing the user experience.

Part I offers a summary of modern software architecture, with a brief overview of domain-driven design concepts and architectural patterns. The focus is on the real meaning of the expression *domain model* and examining how it differs from other flavors of models you might work with. Key to effective design today—an approach that weds domain analysis and user experience—is the separation of commands and queries into distinct stacks. This simple strategy has a number of repercussions in terms of persistence model, scalability, and actual implementation.

Part II begins with a summary of the ASP.NET MVC programming model—the way to go for web developers, especially in light of the new ASP.NET Core platform. Next, it covers Bootstrap for styling and structuring the client side of the views and looks at techniques for posting and presenting data.

Part III is all about user experience in the context of web applications. Web content is consumed through various devices and in a number of situations. This creates a need for having adaptive front ends that “respond” intelligently to the requesting devices. In this book, you’ll find two perspectives regarding client responsiveness: a common responsive web design perspective and the server-side device perspective.

So, in the end, what’s this book about?

It’s about what you need to do and know to serve your customers in the best possible way as far as the ASP.NET platform is concerned. At the same time, the practices and the techniques discussed in the book position you well for participating in the bright future of ASP.NET Core.

Finding your best starting point in this book

Overall, I see two main ways to approach the book. One is reading it from cover to cover, paying special attention to software design and architecture first and then taking note of how those principles get applied in the context of common but isolated programming tasks. The other approach consists of treating Part I—the part on software design and architecture—as a separate book and reading it when you feel it is necessary.

If you are	Follow these steps
Relatively new to ASP.NET development but not to web development	Ideally, you should read the book cover to cover, and be sure not to skip Chapter 4, “Architectural options for a web solution.”
Familiar with ASP.NET MVC or Bootstrap	Briefly skim Chapter 8, “Core of ASP.NET MVC,” and Chapter 9, “Core of Bootstrap.” Also, depending on your personal feelings, you might want to also skim Chapter 6, “ASP.NET state of the art,” and Chapter 10, “Organizing the ASP.NET MVC project.” Note that the book provides one chapter about ASP.NET Core, but that is mostly to help you form an idea about it.
Interested in practical solutions	Read Part II and Part III.

Most of the book’s chapters include hands-on samples you can use to try out the concepts you just learned. No matter which sections you choose to focus on, be sure to download and install the sample applications on your system.

System requirements

To open and run provided examples, you just need a working edition of Microsoft Visual Studio.

Downloads

All sample projects can be downloaded from the following page:

<http://aka.ms/ModernWebDev/downloads>

Acknowledgments

A bunch of great people made this book happen: Devon Musgrave, Roger LeBlanc, Steve Sagman, and Marc Young. It’s a battle-tested team that works smoothly and effectively to turn draft text into readable and, hopefully, pleasantly readable text.

When we started this book project, we expected to cover a new product named ASP.NET vNext, but the new product, now known as ASP.NET Core, is still barely in sight. In light of this, we moved the target along the way, and Devon was smart enough and flexible enough to accept my suggestions on variations to the original plan.

Although you'll find some information about ASP.NET Core in the book, a new ASP.NET Core book is on its way. Ideally, it will be from the same team!

Errata, updates, & book support

We've made every effort to ensure the accuracy of this book and its companion content. You can access updates to this book—in the form of a list of submitted errata and their related corrections—at:

<http://aka.ms/ModernWebDev>

If you discover an error that is not already listed, please submit it to us at the same page.

If you need additional support, email Microsoft Press Book Support at *mspinput@microsoft.com*.

Please note that product support for Microsoft software and hardware is not offered through the previous addresses. For help with Microsoft software or hardware, go to *<http://support.microsoft.com>*.

Free ebooks from Microsoft Press

From technical overviews to in-depth information on special topics, the free ebooks from Microsoft Press cover a wide range of topics. These ebooks are available in PDF, EPUB, and Mobi for Kindle formats, ready for you to download at:

<http://aka.ms/mspressfree>

Check back often to see what is new!

We want to hear from you

At Microsoft Press, your satisfaction is our top priority, and your feedback our most valuable asset. Please tell us what you think of this book at:

<http://aka.ms/tellpress>

We know you're busy, so we've kept it short with just a few questions. Your answers go directly to the editors at Microsoft Press. (No personal information will be requested.) Thanks in advance for your input!

Stay in touch

Let's keep the conversation going! We're on Twitter: <http://twitter.com/MicrosoftPress>



The layered architecture

We shape our buildings; thereafter they shape us.

—Winston Churchill

It has been quite a few years since computer programs have been the result of monolithic software. Monolithic software is an end-to-end sequence of procedural instructions that achieve a goal. While nearly no professional developers or architects would seriously consider writing end-to-end programs today, building monoliths is the most natural way of approaching software development for newbies. Monoliths are not bad per se—it's whether the program achieves its mission or not that really matters—but monoliths become less and less useful as the complexity of the program grows. In real-world software architecture, therefore, monoliths are simply out of place. And they have been out of place for decades now.

In software, a layer hides the implementation details of a given set of functionality behind a known interface. Layers serve the purpose of Separation of Concerns and facilitate interoperability between distinct components of the same system. In an object-oriented system, a layer is essentially a set of classes implementing a given business goal. Different layers may be deployed to physical tiers, sometimes in the form of services or micro-services available over a known network protocol such as HTTP.

A layer is a segment of software that lives in-process with other layers. Layers refer to a logical, rather than physical, separation between components. The *layered architecture* I present in this chapter is probably the most widely accepted way to mix functionality and business to produce a working system.

Beyond classic three-tier systems

You might have grown up with the idea that any software system should be arranged around three segments: the presentation, business, and data layers. The *presentation* segment is made of screens (either desktop, mobile, or web interfaces) used to collect input data and present results. The *data* segment is where you deal with databases and save and read information. The *business* segment is where everything else you need to have fits in. (See Figure 5-1.)

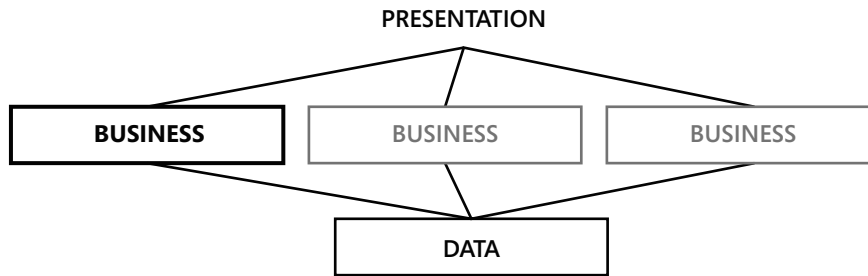


FIGURE 5-1 The classic three-tier segmentation of software architecture

Industry literature mostly refers to the architecture depicted in Figure 5-1 as a *three-tier architecture*. However, you can allocate segments both on physical tiers and logical layers. It just depends on your needs.

Working with a three-tier architecture today

The three-tier architecture has been around for a long time, but it originated at a time when most business work was either database related or restricted to external components such as mainframes. For the most part, the three-tier architecture uses a single data model that travels from the data store up to the presentation and back.

The architecture certainly doesn't prevent you from using other flavors of data-transfer objects (DTOs), but for the most part the three-tier architecture is emblematic of just one data model and is database-centric. The challenge you face these days—foreseen by Domain-Driven Design (DDD)—is matching persistence with presentation needs. Even though the core operations of any system remains Create-Read-Update-Delete (CRUD), the way in which business rules affect these core operations require the business layer to take care of way too many data transformations and way too much process orchestration.

Even though a lot of tutorials insist on describing an e-commerce platform as a plain CRUD regarding customers and orders, the reality is different. You never just add an order record to a database. You never have just a one-to-one match between the user interface of an order and the schema of the Orders table. Most likely, you don't even have the perception of an order at the presentation level. You more likely have something like a shopping cart that, once processed, produces an order record in some database tables.

Business processes are the hardest part to organize in a three-tier mental model. And business processes are not simply the most important thing in software; they're the only thing that really matters and they're the thing for which no compromises are possible. At first glance, business processes are the heart of the business tier. However, more often than not, business processes are too widespread to be easily restricted within the boundaries of an architecture that likes to have layers that can easily turn into physical tiers. Different presentation layers can trigger different business processes, and different business processes can refer to the same core behavior and the implementation of a few rules.

Although the meaning of business logic seems to be quite obvious, the right granularity of the reusable pieces of business logic is not obvious at all.

Fifty shades of gray areas

In a plain three-tier scenario, where would you fit the logic that adapts data to presentation? And where does the logic that optimizes input data for persistence belong? These questions highlight two significant gray areas that some architects still struggle with these days.

A *gray area* is an area of uncertainty or indeterminacy in some business context. In software architecture, the term also refers to a situation in which the solution to apply is not obvious and the uncertainty originates more from the availability of multiple choices than the lack of tools to solve the problem.

To clear the sky of gray areas, a slightly revisited architecture is in order. When Eric Evans first introduced Domain-Driven Design (which I discuss in Chapter 1, “Conducting a thorough domain analysis”), he also introduced the layered architecture, as depicted in Figure 5-2.

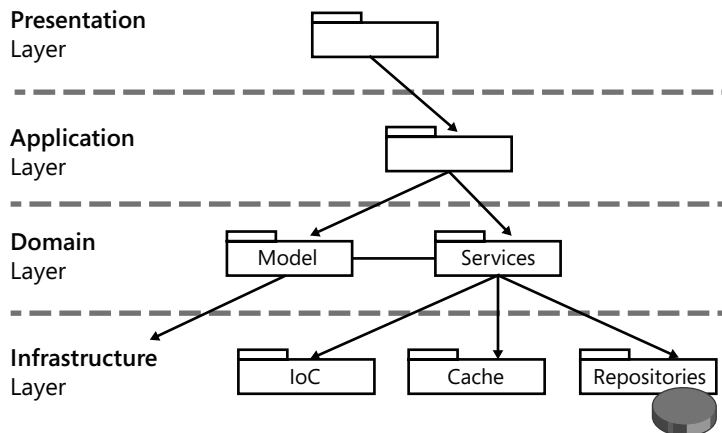


FIGURE 5-2 The layered architecture

The layered architecture has an extra layer and expands the notion of a data-access layer to that of just the provider of any necessary infrastructure, such as data access via object-relational mapping (ORM) tools, implementation of inversion of control (IoC) containers, and many other cross-cutting concerns such as security, logging, and caching.

The business layer exploded into the application and domain layers. This trend is an attempt to clear up the gray areas and make it clear that there are two types of business logic: application and domain. The *application* logic orchestrates any tasks triggered by the presentation. The *domain* logic is any core logic of the specific business that is reusable across multiple presentation layers.

The application layer aligns nearly one-to-one with the presentation layer and is where any UI-specific transformation of data takes place. The domain logic is about business rules and core business tasks using a data model that is strictly business oriented.

The presentation layer

The presentation layer is responsible for providing some user interface to accomplish any necessary tasks. The presentation layer consists of a collection of screens, either HTML forms or anything else. Today, more and more systems have multiple presentation layers. This is an ASP.NET book, so you might think that, at least in the current context, there's just one presentation layer. Not exactly, I'd say.

The mobile web is another presentation layer that must be taken into account for a web application. A mobile web presentation layer, then, can be implemented through responsive HTML templates or a completely distinct set of screens. However, that doesn't change the basic fact that the mobile web is an additional presentation layer for nearly any web application.

The user experience

No matter what kind of smart code you lovingly craft in the middle tier, no applications can be consumed by any users without a presentation front end. Furthermore, no applications can be enjoyable and effective without a well-designed user experience. However, for a long time the presentation layer has been the last concern of developers and architects.

Many architects consider presentation as the less noble part of the system—almost a detail once the business and data-access layers have been fully and successfully completed. The truth is that the presentation, as well as the business logic and data-access code, is equally necessary in a system of any complexity. These days, though, the user experience—the experience the users go through when they interact with the application—is invaluable, as I explained in Chapter 3, “UX-Driven Design.”

At any rate, whether you develop the system in a top-down manner (as recommended in Chapter 3) or in a more classic bottom-up fashion, you need to understand the purpose of the presentation. Take a look at Figure 5-3.

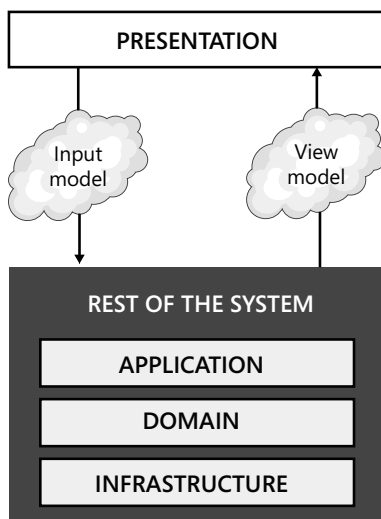


FIGURE 5-3 Describing the data that goes into and out of presentation screens

The presentation layer funnels data to the rest of the system, ideally using its own data model that reflects the structure well and organizes the data in the screens. You should render the user interface as an order entity, and not just because you end up storing data in an Orders table. For example, when you submit an order, you typically collect information like the shipping address that might or might not be related to the customer that is paying for the order. And the shipping address doesn't necessarily get stored with the order. It could be that the shipping address is communicated to the shipping company and the reference number is stored with the order.

Generally speaking, each screen in the presentation that posts a command to the back end of the system groups data into an input model and receives a response using classes in a view model. The input and view models might or might not coincide. At the same time, they might or might not coincide with any data model being used in the back end to perform actual tasks.

The input model

In ASP.NET MVC, any user's clicking originates a request that a controller class will handle. Each request is turned into an action mapped to a public method defined on a controller class. What about input data?

In ASP.NET, any input data is wrapped up in the HTTP request, either in the query string, in any form-posted data, or perhaps in HTTP headers or cookies. Input data represents the data being posted for the system to take an action on. Whatever way you look at it, it is just input parameters. You can treat input data as loose values and variables, or you can group them into a class acting as a container. The collection of input classes form the overall input model for the application.

As you'll see in a lot more detail in upcoming chapters, in ASP.NET MVC a component part of the system infrastructure—the model-binding layer—can automatically map sparse and loose variables in the HTTP request to public properties of input model classes. Here are two examples of a controller method that are equally effective:

```
public ActionResult SignIn(string username, string password, bool rememberme)
{
    ...
}

public ActionResult SignIn(LoginInputModel input)
{
    ...
}
```

In the latter case, the *LoginInputModel* class will have public properties whose names match the names of uploaded parameters:

```
public class LoginInputModel
{
    public string UserName { get; set; }
    public string Password { get; set; }
    public bool RememberMe { get; set; }
}
```

The input model carries data in the core of the system in a way that aligns one-to-one with the expectations of the user interface. Employing an input model makes it easier to design the user interface in a strongly business-oriented way. The application layer (shown in Figure 5-3) then takes care of unpacking any data and consuming it as appropriate.

The view model

Any request gets a response and, more often than not, the response you get from ASP.NET MVC is an HTML view. (Admittedly, this is not the only option, but it's still quite the most common.) In ASP.NET MVC, the creation of an HTML view is governed by the controller, which invokes the back end of the system and gets back some response. It then selects the HTML template to use and passes the HTML template and data to an ad-hoc system component—the view engine—which will mix the template and data and produce the markup for the browser.

In ASP.NET MVC, there are a few ways to pass data to the view engine that will be incorporated in the resulting view. You can use a public dictionary such as *ViewData*, a dynamic object such as *ViewBag*, or a made-to-measure class that collects all properties to pass. Any class you create to carry data to be incorporated in the response contributes to creating the view model. The application layer is the layer that receives input-model classes and returns view-model classes:

```
public ActionResult Edit(LoginInputModel input)
{
    var model = _applicationLayer.GetSomeDataForNextView(input);
    return View(model);
}
```

More and more, in the future the ideal format for persistence will be different from the ideal format for presentation. The presentation layer is responsible for defining the clear boundaries of acceptable data, and the application layer is responsible for accepting and providing data in just those formats. If you take this approach extensively, you then fall in line with the principles outlined in Chapter 3 regarding UX-driven software design.



Note Putting the presentation layer at the center is an approach that pays off whether you use a server-side approach to the building of the web solution or a client-side solution.

The application layer

To carry on business operations, the presentation layer needs a reference to the back end of the system. The shape and color of the entry point in the business layer of the application depends on how you actually organized that.

In an ASP.NET MVC solution, you can call the infrastructure layer directly from the controller via a few repository classes. Generally, though, you want to have an intermediate layer or two in between controllers (for example, as part of the presentation layer) and repositories (for example, as part of the infrastructure layer). Have a look at Figure 5-4.

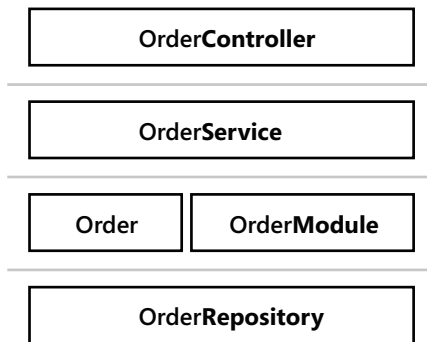


FIGURE 5-4 An aggregate-based section of the layered architecture

As you can see from the picture, you can access repositories from within controllers, but that's just a way to simplify things when the simplification of the design doesn't end up adding more pain than gain. A layered architecture is generally based on four logical layers. Each layer has its own place, and if you don't use any it should be because you have good reasons (mostly because of simplification) to do that.

Entry point in the system's back end

Each interactive element of the user interface (for example, buttons) triggers an action in the back end of the system. In some simple scenarios, the action that follows some user's clicking takes just one step to conclude. More realistically, though, the user's clicking triggers something like a workflow.

The application layer is the entry point in the back end of the system and the point of contact between the presentation and back end. The application layer consists of methods bound in an almost one-to-one fashion to the use-cases of the presentation layer. You can group methods in any way that makes sense to you.

I tend to organize application-layer methods in classes that go hand in hand with controller classes. In this way, the *OrderController* class, for example, has its own private instance of an *OrderService* class. (See Figure 5-4.)

Methods in the *OrderService* class get classes in the input model and return classes from the view model. Internally, this class performs any necessary transformation to make data render nicely on the presentation and be ready for processing in the back end.



Note I suggest you apply the same logic that leads you to split functions on controller classes to create application-layer classes. On the other hand, user requests are mapped to controller actions and controller actions should be mapped to business processes orchestrated in the application layer. However, it is acceptable for you to use a custom mapping of methods onto classes if that helps you achieve a higher level of reusability, especially when multiple presentation front ends are involved.

Orchestration of business processes

The primary purpose of the application layer is abstracting business processes as users perceive them and mapping those processes to the hidden and protected assets of the application's back end. In an e-commerce system, for example, the user expects a shopping cart, but the physical data model might have no entity like the shopping cart. The application layer sits in between the presentation and the back end and performs any necessary transformation.

Accepting an order is typically a multistep workflow and never a single step. If it's a single step, you might not find any benefit in passing through the application layer. Otherwise, the application layer helps immensely to keep workflows distinct from business rules and domain-specific processes. To better understand the difference between application logic and domain logic, consider the following example from a banking scenario.

As a customer, you can talk to a teller and ask to deposit a paper check. Ultimately, some money will be withdrawn from one account and added to another one. But actual processes might be quite different. At a minimum, the teller will go through a process that first places a request to the issuing bank and then adds some money to your account. So you have two operations:

- Cash check from a bank.
- Add money to a bank account.

Both operations are domain-level operations, and both are core tasks of the business domain. The combination of the two, on the other hand, is a workflow that is bound to a specific use-case of the presentation layer—letting users deposit a check. The resulting workflow represents a statement like “Deposit a check” and, depending on the implementation and external services involved, might or might not be a core domain operation. That's an architectural decision after all.

Splitting the business logic into application and domain logic gives you the logical tools to better model the business logic as close as possible to the real world and, more than everything else, close to the user's expectations.



Note These days, the user experience is more important than it once was for the success of any application at any level of complexity. So, to provide an excellent user experience, the golden rule is, “You better have an application layer.”

The domain layer

Any software—even the simplest data-entry application—is written against a business domain. Each business domain has its own rules. The number of rules is sometimes close to zero, but as an architect you should always reserve room for a collection of business rules. Finally, each business domain exposes a sort of an application programming interface (API). The way in which the presentation allows end users to interact with such an API—use-cases—determines the application layer.

In a nutshell, the domain layer hosts the entire business logic that is not specific to one or more use-cases. Typically, the domain layer consists of a model (known as the *domain model*) and possibly a family of services (known as *domain services*).

The mythical domain model

Frankly, I find that there's a lot of confusion around the intended role and purpose of the domain model. Abstractly speaking, the domain model is a plain software model that helps render the business domain. The software model can be defined using an object-oriented paradigm (the most common scenario) or any other approach you might find appropriate, such as the functional paradigm. The domain model is the place where you implement the business rules and common, reusable business processes.

Even when you use an object-oriented paradigm, the domain model might or might not be a plain entity-relationship model and might or might not have a one-to-one relationship with the persistence model. The domain model is not strictly related to persistence; the domain model must serve the supreme purpose of implementing business rules. Persistence comes next and is one of the concerns of the infrastructure layer.

In terms of technologies, there's a lot of hype about Entity Framework Code First, which makes it easy to create your classes and then instruct the runtime to create database tables accordingly. This is not domain modeling—it's persistence modeling. As an architect, you should be well aware of logical layers: domain models are a different thing than persistence models. However, the two models can match—and usually match in simpler scenarios—and this brings Entity Framework Code First into play.

In a domain model that focuses on the logic and business rules, inevitably you have classes with factories, methods, and read-only properties. *Factories*, more than constructors, let you express the logic necessary to create new instances. *Methods* are the only way to alter the state of the system according to business tasks and actions. *Properties* are simply a way to read the current state of an instance of the domain model.

An object-oriented domain model is not necessarily an entity relationship model. It can be simply a collection of sparse and loose classes that contain data and store any behavior in separate classes with only methods. A model with entities devoid of any significant behavior—that is, mere data structures—form an *anemic domain model*.

A domain model lives in memory and is, to a great extent, stateless. Yet, some business-relevant actions require database reads and writes. Any interaction with the database—including the canonical example of determining whether a given customer has reached the status of “gold” customer (whatever that means in the business)—should happen outside the domain model. It should occur within the domain layer. This is why, along with a domain model, the domain layer should also feature domain services.

The equally mythical concept of domain services

It’s quite simple to explain what a domain model is. Typically, developers nearly instantaneously and completely understand the concept of a software model that renders a business domain. The trouble emerges at a later time when you insist on the ideal separation between domain and persistence.

The point is that a significant part of the business logic is related to the manipulation of information that is persistently saved in some data store or held and controlled by some external web services. In an e-commerce system, to determine whether a customer has reached the status of gold customer, you need to count the amount of orders placed in a given timeframe and compare it to a selected range of products. The output of such a complex calculation is a plain Boolean value that you store in a fresh instance of the Customer domain-model class. Yet you still have a lot of work to do to get that value.

Which module is in charge of that?

Domain service is the umbrella under which a number of helper classes fall. A *domain service* is a class that performs reusable tasks related to the business logic, and it performs them around the classes in the domain model that implement business rules. Classes in the domain services segment have free access to the infrastructure layer, including databases and external services. A domain service, for example, orchestrates repositories—plain classes that perform CRUD operations on entities in the persistence model.

A simple rule for domain services is that you have such a domain service class for any piece of logic you need that requires access to external resources, including databases.

A more pragmatic view of domain modeling

I’ve probably been too rigorous and abstract in describing the domain layer. Whatever I stated is correct, but in the real world you often apply some degree of simplification. Simplification is never a bad thing, as long as you know exactly which logical layers you are removing for simplicity. If you look at a simplified model, you risk missing some important architectural points that exist even though they might be overkill in that scenario.

There are two terms I need to further explain here in the context of simplifying the architecture of the domain layer: *aggregates* and *repositories*.

Both terms have some DDD heritage. An *aggregate* is a whole formed by combining one or more distinct domain objects that are relevant in the business. It’s a logical grouping you apply to simplify

the management of the business domain by working with fewer coarse-grained objects. For example, you don't need to have a separate set of functions to deal with the items of an order. Order items make little sense without an order; therefore, orders and order items typically go in the same aggregate. Also, products might be used in the context of an order but, unlike order items, a product might also be acted on outside of orders—for example, when users view the product description before buying.

A *repository* is a component that manages the persistence of a relevant domain object or aggregation of domain objects. You can assign repositories any programming you like, though many developers design these classes around a type *T* being a relevant domain type.

In DDD domain modeling, the concept of an aggregate is a key concept. The vision I'm trying to convey here is more task-oriented and subsequently less centered on entities. The role of an aggregate, therefore, loses importance in the context of the domain layer but remains central in the realm of the infrastructure layer.

In the domain layer, you should focus on classes that express business rules and processes. You should not aim at identifying aggregations of data to persist. Any aggregation you identify should simply descend from your business understanding and modeling. Next, you have the problem of persisting the state of the system.

And when it comes to this, you have at least two options. One option is the classic persistence of the last-known-good-state of the system; the other option is the emerging approach known as *event sourcing*, in which you just save what happened and describe what has happened and any data involved. In the former case, you need aggregates. In the latter case, you might not need aggregates as a way to keep related data together in the description of the event that has happened.

The infrastructure layer

The infrastructure layer is anything related to using concrete technologies, whether it's data persistence (ORM frameworks like Entity Framework), external web services, specific security API, logging, tracing, IoC containers, caching, and more.

The most prominent component of the infrastructure layer is the persistence layer—nothing more than the old-faithful data-access layer, possibly extended to cover a few data sources other than plain relational data stores. The persistence layer knows how to read or save data and is made of repository classes.

Current state storage

If you use the classic approach of storing the current state of the system, you'll need one repository class for each relevant group of entities—this is the aggregate concept. By *group of entities*, I mean entities that always go together like orders and order items.

The structure of a repository can be CRUD-like, meaning you have Save, Delete, and Get methods on a generic type *T* and work with predicates to query ad hoc sections of data. Nothing prevents you from giving your repository a remote procedure call (RPC) style with methods that reflect actions—whether the actions are reads, deletes, or insertions—that serve the business purpose.

I usually summarize this by saying that there's no wrong way to write a repository. Technically, a repository is part of the infrastructure layer. However, from the perspective of simplifying things, a repository can be seen as a domain service and can be exposed up to the application layer so that the application can better orchestrate complex application-level workflows.

Event stores

I would bet that event sourcing will have a dramatic impact on the way we write software. As discussed in Chapter 2, "Selecting the supporting architecture," event sourcing involves using events as the primary data source of the application.

Event sourcing is not necessarily useful for all application. In fact, developers blissfully ignored it for decades. Today, however, more and more domain experts need to track the sequence of events the software can produce. You can't do this with a storage philosophy centered on saving the current state. When events are the primary data source of your application, a few things change and the need for new tools emerges.

Event sourcing has an impact on two aspects: persistence and queries. *Persistence* is characterized by three core operations: insert, update, and delete. In an event-sourcing scenario, insert is nearly the same as in a classic system that persists the current state of entities. The system receives a request and writes a new event to the store. The event contains its own unique identifier (for example, a GUID), a type name or code that identifies the type of the event, a timestamp, and associated information such as the content that makes up the data entity being created. The update exists in another insert in the same container of data entities. The new entry simply indicates the data—which properties has changed, the new value and, if relevant in the business domain, why and how it changed. Once an update has been performed, the data store evolves as in Figure 5-5.

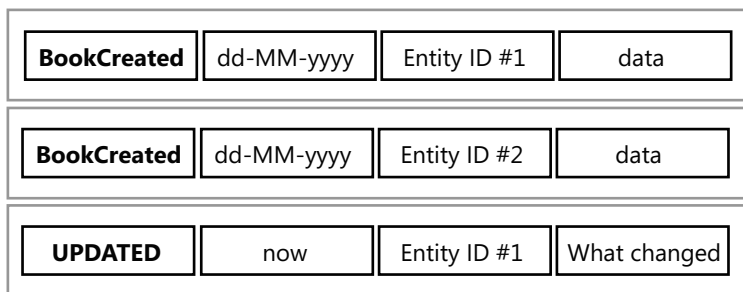


FIGURE 5-5 A new record to indicate the update to the book entity with ID #1

The delete operation works in the same way as an update except that it has different type information.

Making updates in an event-based data store immediately creates a few issues when it comes to queries. How do you get to know if a given record exists or, if it exists, what its current state is? That requires an ad hoc layer for queries that conceptually selects all records with a matching ID and then analyzes the data-set event after the event. For example, it could create a new data entity based on the content of the Created event and then replay all successive steps and return what remains at the end of the stream. This technique is known as *event replay*.

The plain replay of events to rebuild the state might raise some concerns about performance because of the possible huge number of events to process. The problem is easy to understand if you think of the list of events that make up the history of a bank account. As a customer, you probably opened the bank account a few years back and went through hundreds of operations per year. In this context, is it acceptable to process hundreds of events every time you want to see the current balance? The theory of event sourcing has workarounds for this scenario, the most important of which consists of creating snapshots. A *snapshot* is a record that saves the known state of the entity at any given time. In this way, to get the current balance you process only the events recorded since the latest snapshot was taken.

Event sourcing gives architects and domain experts a lot more power to design effective solutions, but for the time being it requires a lot of extra work to create and operate the necessary infrastructure. Event sourcing requires a new family of tools—*event stores*. An event store is another type of database with a public API and a programming language tailor-made for event data items.

Caching layers

Not all data you have in a system changes at the same rate. In light of this, it makes little sense to ask the database server to read unchanged data each and every time a request comes in. At the same time, in a web application requests come in concurrently. Many requests might hit the web server in a second, and many of those concurrent requests might request the same page. Why shouldn't you cache that page or at least the data it consumes?

Very few applications can't survive a second or two of data caching. In a high-traffic site, a second or two can make the difference. So caching, in many situations, has become an additional layer built around ad hoc frameworks (actually, in-memory databases), such as Memcached, ScaleOut, or NCache.

External services

Yet another scenario for the infrastructure layer is when data is accessible only through web services. A good example of this scenario is when the web application lives on top of some customer relationship management (CRM) software or has to consume proprietary company services. The infrastructure layer, in general, is responsible for wrapping external services as appropriate.

In summary, architecturally speaking, these days we really like to think of an infrastructure layer rather than a plain data-access layer that wraps up a relational database. Caching, services, and events are all emerging or consolidated aspects of a system, and they work side by side with plain persistence.

Summary

Software will never be what it was some 10 years ago. Software is destined to be more and more integrated with real life. For this to happen—and it will happen—we have to revisit our architectural principles and change some of them.

In this chapter, I presented a general and generic architecture that can be adapted to any type of software you might write today. It's an evolutionary phase of the classic multitier architecture we grew up with. Although it apparently adds only an extra layer, it has a deep impact on the way we think and do things.

I encourage you to form a clear picture of the purpose of the layered architecture and all its parts before you move further into the book. The issue I see is not that you might miss the point of what a layered architecture represents. That's well-known, at least at a big-picture level. It's the little-known details of the layered architecture—the parts subject to simplification—that represent the sore point and the aspects of the architecture I recommend you spend some time on. Even spending time to decide you don't need those parts is more productive than ignoring them.



Index

Symbols

/ (forward slash), 139, 141

A

abstraction, 226

Accept-* HTTP headers, 389

AcceptVerbs, 148

Access-Control-Allow-Methods, 346

Access-Control-Allow-Origin, 345

access tokens, 349

ACID consistency, 35

Action, 257–258

action filters, 295

 HandleError, 238

 xxxConfig, 222

action methods, 150–151

 producing results, 158–168

ActionName, 148, 163, 250

ActionResult, 80, 151, 158–159, 338, 340

action result classes, 160

actions

 mapping to HTTP verbs, 148–150

 mapping to methods, 147–148

active users, architecture design, 31

ActiveX, 351

adaptiveness, 365

adding services, 125

ad hoc event stores, 44

ad hoc frameworks, 84

ad hoc infrastructure, 39

ad hoc mobile sites, 393

ad hoc model binding, 153–158

AdminController, 288

ADO.NET, 31

 calls, 146

 data access, 14

 data-access layer, 214

 persistence, 222

 repository class, 227

advertised_device_os, 395

advertising, optimizing with WURFL.JS, 388

aggregated objects, 23

aggregate root, 29

aggregates, 18, 28–30, 96–97, 229

 Customer, 31

 distinct stacks, 34

 replaying events, 45

Ajax, 104, 351

 \$.ajax function, 353–355

 \$.ajax method, 344

 caching, 356

 \$.get, 355

 \$.getJSON, 355

 jQuery snippets, 167

 load, 355

 paging data, 266–267

 placing calls, 355

 \$.post, 355

 shorthand functions, 355

 user experience, 337

\$.ajax function, 353–355

\$.ajax method, 344

Ajax POST, 301

Ajax requests, CORS, 350–351

alert widgets, 294

all-encompassing context, 13

AllowAnonymous, 242

always, jqXHR, 354

Amazon, device detection, 393–394

analytics, enhancing with WURFL.JS, 388

AND, 367–368

Android

 adapting views for, 381–389

 CSS media queries level 4 standard, 368

 date input field, 383

Android

- Android (*continued*)
 - PICTURE, 376
 - tel input field, 382–383
- anemic domain model, 95
- AngularJS, 77, 84, 104, 358
- anticorruption layer, 16
- ApiController, 80, 349
- APIs (application programming interfaces), 95
 - private setters, 27
- append-only data stores, 44
- Apple iPad, device detection, 397
- Apple iPhone
 - media types, 367
 - Responsive Web Design (RWD), 366
- ApplicationDbContext, 226
- application hosts, 114
- application/json MIME, 338
- application layer, 20, 92–94
 - controllers, 147
 - data model, 220
 - external services, 32
 - repository classes, 228
 - worker-service class, 225
- application-layer methods, 58
- application logic, 20–21, 50, 65, 89
 - design of, 9
 - difference from domain logic, 21
 - gray areas, 20
 - patterns of, 21
- application programming interfaces (APIs), 27, 95
- application routes, 138–145
- applications, 90, 227
 - mapping ASP.NET MVC, 218–219
 - multitenant, 223
- application services, 225–227
- application settings, 126–127
- Application_Start, 140
- application startup, 220–224
- appSettings, 126–127
- App_Start, 140
- architect role, 51–52
- architecture
 - application-layer, 58
 - ASP.NET Core, 122
 - ASP.NET MVC, 77, 80
 - ASP.NET Web API, 80
 - bounded context, 14
 - controller, 58
 - data model, 214
 - DDD changes to, 50
 - dependencies in ASP.NET Core, 68
 - gray area, 89
 - ImageEngine platform, 390
 - input model, 218
 - layered, 65–66
 - onion diagram 1990s, 48
 - onion diagram today, 49
 - three-tier, 65, 88
 - top-down approach, 48
 - user vs. developer perspective, 66
 - view model, 219–220
- architecture design,
 - active users, 51
 - choosing Bootstrap, 175
 - passive users, 51
 - Table Module, 23
 - Transaction Script, 22
- AreaMasterLocationFormats, 162
- AreaPartialViewLocationFormats, 162
- areas, 145
 - ASP.NET MVC, 220
 - configuration, 222
 - registering for application startup, 220
- AreaViewLocationFormats, 162
- art direction, 375, 391
- Asimov, Isaac, 171
- aspect ratio, 367
- ASP.NET
 - Application Hosting, 223–224
 - binding layer login form, 280
 - diagram, 67–68
 - feature-complete, 105–106
 - Identity, 244
 - middleware components, 117
 - Responsive Web Design (RWD), 366
 - SignalR, 104, 359–361
 - state of, 108
 - URL routing HTTP module, 143
 - virtual path provider, 161–163
 - Web Forms, 105
- ASP.NET 1.x, 115
- ASP.NET Core, 64, 66–71
 - impact of, 112
 - new functions, 106
 - reasons to choose, 69–71
 - runtime, 113–118
- ASP.NET Core 1.0, 346
- ASP.NET MVC, 14, 58, 64, 76–79, 105, 111, 118
 - vs. ASP.NET Web API, 80–82
 - display modes, 398
 - exposing JSON content, 338
 - input model, 218

- ASP.NET MVC (*continued*)
 - login form, 281–282
 - paging data, 263–264
 - planning projects, 217–230
 - registering routes, 221
 - URL routing HTTP module, 137–138
 - weak points, 78–79
 - Web API, 347–348
 - vs. Web Forms, 133
 - xxxFor, 291
 - ASP.NET MVC 3, 105
 - ASP.NET Web API, 64–65
 - vs. ASP.NET MVC, 80–82
 - purpose of, 346–347
 - REST, 82
 - role of, 79–83
 - ASP.NET Web Forms, 64, 72–75, 118, 133, 221, 244.
 - See also* Web Forms
 - ASPX, 161
 - ASPX pages, 133
 - async, placing scripts for speed, 252
 - async/await, 129
 - asynchronous operations, 168
 - attribute routing, 143–145
 - attributes
 - About, 148
 - AcceptVerbs, 148–150
 - ActionName, 148, 163
 - AllowAnonymous, 242
 - Authorize, 242
 - Compare, 287
 - contentedittable, 306
 - CustomValidation, 287
 - data annotations, 287–288
 - data-dismiss, 297–298
 - data-id, 273
 - Flags, 148
 - float, 261
 - HandleError, 238
 - HttpGet, 148
 - HttpPost, 148
 - HttpPut, 148
 - media, 367
 - NonAction, 147–148
 - OutputCache, 280
 - Range, 287
 - RegularExpression, 287
 - Remote, 287
 - Required, 287
 - route, 140
 - Route, 144
 - RouteArea, 144
 - RoutePrefix, 144
 - StringLength, 287
 - type, 306
 - ValidationAttribute, 287
 - ViewResult, 163
 - audit logs, 44
 - authentication, 128–129
 - OAuth, 349–350
 - authorization, 128
 - by host, 348
 - Authorize attribute, 128, 242, 348
 - autocompletion, 307–310
 - Bootstrap Typeahead, 307–308
 - simulate a drop-down list, 310
 - Auto-growth, 233
 - autosave, 311
 - Axure, 56
 - Azure SQL Database, 231
- ## B
- back ends
 - end point, 93–94
 - from prototype, 58–59
 - backoffice, 12
 - Backup, 232
 - Balsamiq, 54, 56
 - Base64 text stream, IMG element, 374
 - Basic authentication, 348–349
 - basic query language, 367–368
 - behavior, 25
 - value objects, 26
 - binding,
 - DOM, 356–359
 - posting from login form, 281
 - primitive types, 154–155
 - webHttpBinding, 346
 - Bin folder, 217
 - blog engine, multitenant applications, 223
 - Bloodhound, Typeahead, 308
 - BODY, Bootstrap, 376
 - Boolean model binding, 156
 - Boolean value, 96
 - Bootstrap
 - codes, 177
 - data-placement, 272
 - date-picker, 305–306
 - drill-down view, 276
 - fluid grid schema, 176–177
 - fonts in RWD, 376–378

Bootstrap

- Bootstrap (*continued*)
 - at a glance, 171–176
 - glyph icons, 251
 - grid system, 176–178
 - hidden-xx, 181–182
 - Internet Explorer Compatibility, 175
 - line height, 376
 - media queries, 369
 - modal, 296
 - offsetting columns, 183
 - orientation, 379
 - overall template, 176–177
 - popovers in action, 274
 - popover view, 271–274
 - progress bar, 363
 - pulling columns, 183
 - putting in perspective, 175–176
 - rendering data in logical groups, 261–263
 - Responsive HTML templates, 392
 - Responsive Web Design (RWD), 366
 - screen-based rendering, 178–183
 - setting up, 174–175
 - tool tips, 272
 - visible-xx, 181
 - WURFL.JS, 389
- Bootstrap 3, 378
- Bootstrap 3.x, 376
- Bootstrap 4, 376
 - changes in, 378
 - Internet Explorer 8, 378
 - REM option, 378
- Bootstrap Datepicker, 305–306
- Bootstrap Typeahead, 307–308
- bottom-up approach, 48–50
- bounded context, 4, 10–14
 - architecture, 14
 - backoffice, 12
 - conformist relationship, 16
 - customer/supplier relationship, 16
 - DDD, 226
 - detecting, 11–12
 - discovering, 10
 - distinct, 13–14
 - event storming, 17–18
 - implementing, 12–14
 - online store application example, 11–12
 - partner relationship, 16
 - relationships between, 15–16
 - subdomains, 11
 - two-pizza rule, 17
- bounded text
 - anticorruption layer, 16
 - shared kernel, 16
- Bower file, 119–120
- bower.json, 119–120
- BPM (Business Process Management), 4
- Brandolini, Alberto, 17
- breakpoints, 177
 - Bootstrap codes, 179–180
 - screen size, 179–180
- brittle model, 13
- brownfield migration, 112
- browser personalization, WURFL.JS, 389
- browsers
 - CORS-aware, 345
 - date pickers, 305
 - new input types, 382
 - responsive images, 374–376
- Bundle
 - CSS, 233
 - ScriptBundle, 236–237
 - StyleBundle, 236–237
- BundleCollection, 234
- BundleConfig, 231
- BundleFileSetOrdering, 234
- BundleTable, EnableOptimizations, 232–233
- bundling
 - browser activity, 234
 - LESS, 174
 - optimization, 232–233
 - script files, 233–234
 - working with, 231–235
 - xxxConfig, 222
- buses
 - message-based formulation, 39
 - saga, 42
 - xxxConfig, 222
- business domain, 4
 - modeling, 223
 - repositories, 229
- business layer, 87
 - controller class, 146
- business logic, 19, 88–89
 - DDD changes in, 50
 - Domain Model, 23
 - external services, 32
 - legacy code, 32
 - Table Module, 23
 - Transaction Script, 22
- business logic layer, 65
 - domain model, 216

- business model, ASP.NET Core, 107
- business processes, 88
 - orchestration of, 94
- Business Process Management (BPM), 4
- business rules, 26–28
 - aggregates, 30
 - anemic entity class, 26–27
 - behavior-rich entity classes, 27–28
 - domain model, 216
 - private setters, 27
- button, command, 40

C

- C#, 9, 24
 - input forms, 284
 - in Razor, 166
- cache
 - data model, 220
 - debug=true, 388
- caching, 8
 - Ajax, 356
 - jQuery, 299, 356
 - paging data, 266
- caching layers, 99
- calling back, 362
- canonical data stores, 50
- canonical layered architecture, 33–34
- canonical recovery, 241
- cascading options, 31
- Cascading Style Sheets. *See* CSS
- Cassandra, 231
- catch, 241
- catch-all parameters, 143
- CDN (content delivery network), 233
 - ImageEngine platform, 390
- cell phones, Responsive Web Design (RWD), 366
- child objects, repositories, 31
- Chrome,
 - date pickers, 305
 - PICTURE, 376
- Churchill, Winston, 87
- classes, 24
 - clearfix, 261
 - entity, 25
 - input model class, 288
 - naming conventions, 6
 - size-specific, 181–182
 - worker-service, 225–227
- classic web model, 104
- class names, 177
- clearfix, 181, 261
- click, popover, 272
- Client Hints, 389
- clients
 - broadcasting changes, 364
 - calling back, 362
 - device detection, 388–389
- Clients.All, 365
- client-side device detection, 386–389
 - and responsive pages, 388–389
 - user-agent sniffing, 386
 - WURFL.JS, 387–388
- client-side enhancements, 392–393
- client-side solutions, 92
- client-side validation,
 - HTML5, 382
 - input form, 301–303
 - jQuery, 303, 382
- cloud, hosting with, 111
- cloud API, NuGet, WURLF framework, 394
- CloudClientManager, 398
- cloud-optimized frameworks, 107
- cloud storage, 222
- CLR (Common Language Runtime), 67
 - as DNX layer, 114
 - host, 114
- code
 - Bootstrap, 177
 - breakpoints, 179–180
 - Razor, 164–167
- code assistants, ReSharper, 9
- Code First, 215, 226–227
- col CSS, 370
- collections, model binding, 157–158
- columns,
 - offsetting in Bootstrap, 183
 - pulling in Bootstrap, 183
- Command and Query Separation (CQS), 33–39
- CommandDatabase object, 39
- command processor, 39
- Command Query Responsibility Segregation. *See* CQRS (Command Query Responsibility Segregation)
- CommandResponse, 293
- commands, 40
 - button, 40
 - message-based formulation, 39
 - saga, 42

command stack

- command stack
 - mapping ASP.NET MVC, 219
 - Match example, 36–39
 - repository classes, 228
- common base class, view model, 248
- Common Language Runtime (CLR), 67–68
- communication channel, sharing, 361
- Compare, 287
- complete, 385
- complete_device_name, 387, 395
- conditional style sheets. *See also* CSS
 - CSS media queries, 368–369
- configuration,
 - areas, 222
 - blog engine, 223
 - repositories, 229
 - routes, 222
 - understanding, 223–224
- Configure, 116, 123, 131, 223–224
- ConfigureServices, 123, 224
- confirmation messages, 284–285
- conformist relationship, 16
 - anticorruption layer, 16
- Confucius, 133
- \$.connection, 360
- connection strings, 228
 - repositories, 229
- container class, model binding, 156
- container-fluid class, 178
- container.less, 173
- containers
 - Bootstrap, 177–179
 - DIV elements, 178
 - horizontal scrolling, 268
- content
 - downloaded to any user agent, 372
 - horizontal scrolling, 268
 - modal, 296
 - negotiating, 341–342
 - negotiation, 81
 - pushing, 359–365
 - Web API, 347
- content delivery network (CDN), 233
 - ImageEngine platform, 390
- contenteditable, 306
- Content folder, 228
- ContentResult, 159, 168
- context mapping, 4, 15
- controller classes,
 - exploring, 145–151
 - statelessness, 146
 - writing, 147–151
- controller methods
 - example, 91–92
 - JSON, 338–341
 - POST, 295
- controllers, 61, 76, 225
 - ApiController, 80
 - area, 145
 - areas of ASP.NET MVC, 220
 - ASP.NET Core 1.0, 346
 - asynchronous operations, 168
 - error handling, 238–241
 - granularity, 145–146
 - mapping ASP.NET MVC, 219
 - partial view, 228–229
 - RouteData, 153
 - testability of, 147
 - URL routing HTTP module, 137–138
 - view engine structure, 161
 - view model, 92
- controller-specific folder, 256
- cookie authentication, 128–129
- cookies
 - input data, 152–153
 - TempData, 286
- Cordova, modal windows, 304
- CoreCLR, 112
- CoreCLR.DNX, 113
- CORS (Cross-Origin Resource Sharing), 342–346, 350–351
 - enabling, 344–346
 - status code, 353
- CQRS (Command Query Responsibility Segregation), 14, 24, 33, 65, 79, 219, 285
 - event persistence, 43
 - mapping ASP.NET MVC, 219
 - Match example, 36–39
 - message-based architecture, 42
 - message-based formulation, 39–42
 - polyglot persistence, 231
 - repository classes, 228
- CQS (Command and Query Separation), 33–39
- Create, Read, Update, Delete (CRUD), 12, 75, 78
- cross-entity business logic, 30–31
- Cross-Origin Resource Sharing. *See* CORS (Cross-Origin Resource Sharing)
- cross-platform APIs, WURFL framework, 387
- cross-property validation, 292–293
 - the next view, 293–295

CRUD (Create, Read, Update, Delete), 12, 75, 78

CSS

- orientation, 378
- show/hide, 372
- style sheets, 393

CSS 3

- AND, 367–368
- aspect-ratio, 367
- core properties, 367
- device-aspect-ratio, 367
- device-height, 367
- device-width, 367
- height, 367
- media attribute, 367–368
- Modernizr, 385
- OR, 367–368
- orientation, 367
- width, 367

CSS bundle, 233

CSS classes, 228

CSS files,

- bundling, 231–232
- LESS, 174
- minification, 236–237

CSS float, 181

CSS media queries

- conditional style sheets, 368–369
- fluid grid, 366–367
- media types, 366–367
- Responsive Web Design (RWD), 366

CSS media queries level 4 standard, 368

- Android, 368
- features added, 368
- hover, 368
- pointer, 368
- resolution, 368
- scripting, 368

CssMinify, 236–237

current state storage, 97–98

Customer aggregate, 29, 31

CustomerRepository, 31

customer/supplier relationship, 16

customization, comparison of tools, 233

custom transformers, 237

CustomValidation, 287, 292

custom view engines, 229–230

- VirtualPathProviderViewEngine, 229

D

DAL (data-access layer), 214

data

- annotation attributes for validation, 287
- grid view, 258–259
- paging, 263–268
- passing to partial view, 256
- posting from a modal input form, 299–301
- processing posted, 281–283, 290–291
- rendering in logical groups, 261–263

data access, 131

data-access API, 229

data-access layer (DAL), 214

data-access logic, 228

data annotations

- validation messages, 291
- validation process, 287–288

DataAnnotationsModelValidatorProvider, 287

database-inferred data models, 224

databases

- event store, 99
- impact on model, 5–6
- schema, 126
- segments, 225–226

data-definition language (DDL), 227. *See also* Code

First

data-dismiss, 297–298

data-id, 273

data-input type, Modernizr, 385

data items, displaying, 258–271

data-last, on-demand scrolling, 270–271

data layer, 87

data models, 214

- database-inferred, 224
- different flavors, 214–220
- old-fashioned, 221

data-placement, popover, 272

data repository, 387

DataSet, 222

data sources

- events, 43
- event sourcing, 98

data stores, 98

- append-only, 44

DataTable, 222

data-target, 297

data-toggle, 297

data-transfer objects (DTOs), 33

- view model, 247

data-trigger

- data-trigger, popover, 272
- date pickers, 305–307
 - Bootstrap Datepicker, 305–306
- dates
 - input fields, 305
 - new input types, 382
 - plain text, 307
- DbContext, 38, 225, 227
 - repositories, 229
- DbSet, 38
- DDD (Domain Driven Design), 4, 88
 - changes in, 50
 - DDD-bounded contexts, 226
 - misconceptions, 4–6
- DDL (data-definition language), 227. *See also* Code First
 - First
- debug=true, 388
- default.aspx, 143
- DefaultBundleOrderer, 234
- default location formats, 162
- DefaultModelBinder, 153–154, 157
- default values, 140–141
- defer, 252
- DELETE, 138
- delete operations, 99
- demos, 54
- dependency injection (DI), 225
- design,
 - strategic, 5
 - tactical, 5
- desktop browsers, 382
- desktop view, modal windows, 304
- detail view, 271–276
 - drill-down views, 274–276
 - modal dialog boxes, 276
- detecting authenticated users, 129
- development models, 107–108
- device-aspect-ratios, 367
- device detection, 392
 - WURFL.JS, 388
 - xxxConfig, 222
- device-friendly images, 390–392
- device-friendly views, 392–399
- device-height, 367
- device independence, 371–373
- devices, adapting views for, 381–389
- device-width, 367
- DI (dependency injection), 225
- direct binding, 356–357
- DisableCors, 350
- displayKey, 308
- display modes,
 - ASP.NET MVC, 398
 - device detection, 397
- distinct databases, 34–35
- distinct stacks, 33–34
- DIV
 - modal-content, 297
 - modal-dialog, 297
- DLL files, 217
- DNVM (.NET Version Manager), 115
- DNX (.NET Execution Environment), 113–116
 - hosting web applications, 115–116
 - Kestrel, 122
 - layers of, 114
 - understanding configuration, 223–224
- dnx.exe utility, 114
- DNX runtime environment, 70
- document NoSQL data stores, 50
- document.write, 252
- DOM, binding data, 356–359
- domain, 90
 - mapping ASP.NET MVC, 218–219
- domain class, 288
- Domain-Driven Design (DDD), 4, 88–89
 - domain model, 216–218
 - misconceptions, 4–6
- Domain-Driven Design: Tackling Complexity in the Heart of Software* (Evans), 4, 24
- domain event storming, 17
- domain layer, 30, 50, 95–97
 - data model, 220
 - domain model, 216
- domain logic, 50, 65, 89
 - difference from application logic, 21
 - examining, 21–22
 - persistence, 22
- domain model, 5, 23–24, 95–97, 214, 216–218, 227–228
 - aggregates, 28–30, 96–97
 - architecture, 14
 - bounded context, 12
 - business rules, 26–28
 - canonical layered architecture, 33–34
 - data model, 220
 - distinct stacks, 33–34
 - event store, 44
 - Mercator, 32
 - repositories, 96–97
 - simple exercise, 216–218
 - single model, 224

- domain model (*continued*)
 - sports match example, 26–27
 - value types, 26
 - Domain Model pattern, 5
 - domain services, 30, 95.96
 - cross-entity business logic, 30–31
 - in a Domain Model, 23
 - repositories, 31
 - the role of, 30–32
 - domain-specific terms, 6–8
 - done, jqXHR, 354
 - “Don’t Repeat Yourself” (DRY), 172
 - downloading to different devices, 372
 - downstream context, 15
 - drill-down views, 274–276
 - drop-down lists
 - autocompletion, 307–310
 - text box as, 309–310
 - drop-down menus, 171
 - DRY (“Don’t Repeat Yourself”), 172
 - DTOs (data-transfer objects), 33
 - view model, 247
 - dynamic, 165
- E**
- EF Core (Entity Framework Core), 112
 - Eiffel programming language, 33
 - Einstein, Albert, 109
 - ELMAH (Error Logging Modules and Handlers), 118, 241
 - email input field, 382–383
 - EmptyResult, 159
 - EM units, font size, 377
 - EnableCors, 350
 - EnableOptimizations, BundleTable, 232–233
 - endpoints, 93–94
 - JSON, 338–341
 - Enterprise Library Data Access Application Block, 222
 - entities, 25
 - aggregate roots, 29
 - identity, 25
 - methods, 25
 - persistence, 25
 - properties, 25
 - Entity Framework, 5, 31, 37, 97, 131, 223–228
 - Code First, 226–227
 - database segments, 225
 - persistence model, 215
 - polyglot persistence, 231
 - read model, 38–39
 - repository class, 227
 - Entity Framework 6, 131
 - Entity Framework Code First, 95, 226–227
 - Entity Framework Core (EF Core), 112, 131
 - EnumDataType, 287
 - errorContainer, 302
 - error handling, 238–241
 - errorLabelContainer, 302
 - Error Logging Modules and Handlers (ELMAH), 118, 241
 - error messages,
 - displaying login, 281–282
 - input form, 292
 - status code, 352–353
 - ES (event sourcing), 24, 43–45
 - Evans, Eric, 3–4, 24, 89
 - Domain-Driven Design: Tackling Complexity in the Heart of Software*, 4
 - event-based data stores, 44–45, 50, 98–99, 223
 - event handlers
 - Application_Start, 140
 - saga, 42
 - event projection, 43
 - event replay, 99
 - events, 41, 43
 - immutable, 43
 - orientation change, 379
 - replaying, 45
 - replaying, 45
 - resize, 379
 - saga, 42
 - sequence diagram, 44
 - trend in software, 50
 - event sourcing (ES), 24, 43–45, 97–99
 - Event Store project, 45
 - event storming, 17–18
 - modeling space, 17
 - exception handling tool, 118
 - Exceptionless, 241
 - exceptions
 - collecting, 241
 - NotSupportedException, 143
 - route, 239–240
 - route not found, 238
 - ExecuteResult, 159
 - extension methods,
 - in languages, 9
 - Map, 117
 - MapWhen, 117

extension methods

- extension methods (*continued*)
 - UseExceptionHandler, 117
 - UseStaticFiles, 117
- external services, 32
 - storing data, 99

F

- F#, 24
- F5 effect, 290
- F5 key, 284–285
- Facebook,
 - OAuth, 349–350
 - polyglot persistence, 230
 - social authentication, 244–245
 - WURFL framework, 387
- FacebookAuthenticated, 245
- factories, 95
- fail, jqXHR, 354
- fat-free controllers, 225
- favicon, 252
- feature detection, 392
 - Modernizr, 384–386
 - RWD, 384–386
- FileContentResult, 159
- FileExtensions, 163
- FilePathResult, 159
- FileSetOrderList, 234
- FileStreamResult, 159
- Finish, 37
- Firefox,
 - date pickers, 305
 - device independence, 371
 - PICTURE, 376
- Flags, 148
- flexible rendering, 182
- float, 261
- flow of data, 20
- fluid containers, 178
- fluid grid, 366–367
- folders
 - Application, 227
 - Content, 228
- FontAwesome, 251
- fonts
 - RWD, 376–378
 - in a web application, 228
- font size
 - EM units, 377
 - REM units, 377
 - viewport units, 377
- formatters, Web API, 347
- formatting layer, 81
- form_factor, 387
- forms, 152–153
 - input, 284
 - validation, 286–295
- Forms authentication, 241
- forward slash (/), 141
 - URL parameter, 139
- Fowler, Martin, 5
 - Repository pattern, 227
- frameworks
 - deciding the best, 64–65
 - Web Forms, 64
- functional features, 24
- functional languages, 24
- functional paradigm, 95
- f_XXX, 391

G

- GAC (Global Assembly Cache), 115
- GalaxyBase, 32
- Galileo, 18
- Gandhi, Mahatma, 63
- gated check-ins, 9
- geolocation, 384
- \$.get,
 - Ajax, 355
- GetHttpHandler, 143
- \$.getJSON, 344
 - Ajax, 355
- GetOrderById, 144
- GETs, 138, 144, 285
 - caching, 356
 - login form, 280
- global.asax, 139, 397
 - application startup, 220–224
 - bundling, 231–232
 - RegisterAllAreas, 221
 - registering routes, 221
- Global Assembly Cache (GAC), 115
- globally accessible data, 222
- glossary, 7
 - choosing terms, 7–8
 - and international teams, 9
 - sharing, 8
- glyph icons, 251
- God antipattern, 32
- gold customer, 30

Google, WURFL framework, 387
 Google Maps, 32
 graceful degradation, 373
 granularity,
 controller, 145–146
 user interface, 146
 graph database, polyglot persistence, 231
 graphical user interface (GUI), 52–53
 gray area, 89
 grid system, 371
 Bootstrap, 176–178
 example, 369–370
 media queries, 369–371
 grid view, 258–259
 GridView, 263–264
 group of entities, 97
 Grunt, 120
 GUI (graphical user interface), 52–53
 GUID, saga, 42
 Gulp, 174
 Gulp file, 120–121
 Guriddo jqGrid, 263–264
 GZIP, 231

H

handheld media, 366–367. *See also* media types
 HandleError, 238
 handlers, 41–42
 application startup, 220
 command processor, 40
 Hawking, Stephen, 217
 headers, Accept-* HTTP, 389
 HEAD section, 251, 254
 height,
 CSS 3 media queries, 367
 IMG element, 374
 helper methods, 338–339
 ASP.NET MVC xxxFor, 291
 hidden-xx, 181–182
 high scalability, 43
 h_NNN, 391
 home page, 125
 home/test/*, HTTP handler, 136
 hosting layer, ASP.NET, 115–116
 host pages, client-side validation, 302
 hover
 CSS media queries level 4 standard, 368
 popover, 272
 HTML, 171
 markup, 160–161

 TextBoxFor, 289
 Web API, 346–350
 HTML5, 75
 client-side validation, 382
 date pickers, 305–307
 IMG element, 374
 INPUT, 382
 for mobile devices, 382–384
 Modernizr, 385
 support for browsers, 305–307
 Html.CheckBox, 280
 HTML FORM, 310
 HTML forms, view model, 219–220
 HTML helpers, 254
 Html.Raw helper method, 166
 input form, 289
 Html.PagedListPager, 265
 Html.ValidationMessageFor, 291
 Html.ValidationSummary, 291
 HTML view, 247–258
 HTTP, 346
 HTTP/2, 109
 HTTP 200, 352–353
 HTTP 404 error, 137–138, 143, 239, 352–353
 HTTP 500, 352–353
 HttpApplication, 222
 application startup, 220
 HttpContext, 398
 HTTP endpoints, 65
 HTTP errors, 238–241
 HttpGet, 148
 HTTP GET, 80–81
 HTTP handlers, 130
 defining behavior, 135–136
 exposing JSON content, 338
 home/test/*, 136
 invoking, 136–137
 MvcEmule.HomeController, 136
 HTTP modules, 130
 URL routing, 137–138
 HttpNotFoundResult, 159
 HTTP pipeline, 116–118
 configuring, 123–124
 HttpPost, 148
 HttpPut, 148
 HTTP requests, 133
 open, 351–352
 placing, 351–352
 send, 351–352
 HTTP responses processing, 352
 HttpStatusCodeResult, 159

HttpUnauthorizedResult

- HttpUnauthorizedResult, 159
 - HTTP verbs, 138
 - mapping actions to, 148–150
 - Hub class, 365
 - hubs
 - internals, 362–363
 - ProgressHub, 362
 - hybrid SPA, 84, 104
- I**
- IActionResult, 17
 - IApplicationBuilder, 117, 124, 223–224
 - IBundleOrderer, 234
 - IBundleTransform, 236–237
 - icon, website, 252
 - ID, saga, 42
 - id attribute, 281
 - identity, 25
 - value objects, 26
 - ID.Next, 36
 - IFRAME, 228–229
 - ignore lists, 235
 - BundleCollection, 234–235
 - IgnoreRoute, 143
 - IHostingEnvironment, 124
 - IHTTPHandler, 135
 - IIS (Internet Information Services), 67–68, 347
 - IIS 7, 106, 110, 345
 - IISPlatformHandler, 122
 - ILoggerFactory, 124
 - ImageEngine, 390, 393
 - account with, 391
 - ImageEngine Lite, 376
 - image-resizing tool, 390
 - images
 - client device detection, 388–389
 - device-friendly, 390–392
 - resizing automatically, 391–392
 - responsive, 374–376
 - in a web application, 228
 - IMG elements, 374
 - JSONP, 342
 - immutable events, 43
 - immutable types, 25
 - imports, LESS, 173
 - Include, 232
 - IncludeDirectory, 232
 - incoming requests, 134–145
 - Index defragmentation, 232
 - index.smartphone.cshtml, 398
 - Indigo Studio, 57
 - infrastructure, 90
 - mapping ASP.NET MVC, 218–219
 - infrastructure layer, 30, 97–100
 - data model, 220
 - domain model, 216
 - @inject, 127
 - inline editing, 311
 - INPUT
 - HTML5, 382
 - login form, 280
 - test input type, 385
 - input data
 - action methods, 150–151
 - new types for mobile devices, 382–383
 - processing, 152–158
 - route, 153
 - input forms, 284–304
 - error messages, 292
 - modal, 296–304
 - presenting, 289–290
 - tips for large, 310–311
 - input model class, 153
 - decorating, 288
 - input models, 90–92, 218, 227–228
 - data model, 220
 - Instagram, 244
 - instances, 248
 - Int32 types, 25
 - integrated pipeline, 110
 - interactivity, 365
 - internal state, Match example, 37
 - Internet Explorer
 - ActiveX, 351
 - Bootstrap, 175
 - date pickers, 305
 - device independence, 371
 - input types, 383
 - site icon, 252
 - Internet Explorer 7, 351
 - Internet Explorer 8
 - Bootstrap, 175
 - Bootstrap 4, 378
 - Internet Information Services. *See under* IIS (Internet Information Services)
 - inversion of control (IoC)
 - data model, 220
 - xxxConfig, 222
 - iPad, Responsive Web Design (RWD), 366

iPhone. *See also* Apple iPhone
 adapting views for, 381–389
 Responsive Web Design (RWD), 366

IQueryable objects, 39

IRouteHandler, 142

IsAjaxRequest, 301

IsDesktop, 398

IsGold method, 31

IsInProgress, 27

IsKnownOrigin, 345

is_mobile, 387

IsSmartphone, 398

is_smartphone, 395

is_tablet, 395

IsTeamLeading, 27

is_wireless_device, 395

Item indexer, 152

IViewEngine, 161

J

Java, 24

JavaScript, 68, 109
 action methods with, 151
 for adapting views, 381–389
 ASP.NET MVC, 77
 in Bootstrap, 171
 minification, 236–237
 Paginator, 267
 paging data, 263–264
 placing scripts, 252
 posting from a modal input form, 299–301
 Save button, 310
 template libraries, 357–359

JavaScriptResult, 159

JavaScriptSerializer, 338, 340

jQuery, 77, 167
 \$.ajax function, 353–355
 ASP.NET SignalR, 360–361
 caching, 299, 356
 client-side validation, 301, 303, 382
 drill-down view, 276
 file bundling, 234–235
 jqXHR, 353
 library, 344
 Mobile websites, 304
 plugins in Bootstrap, 171
 tools, 353–356
 validation, 299–302

jQuery UI, 305
 date-picker plugin, 385

JsMinify, 236–237

JSON, 81
 action methods with, 151
 endpoints, 338–341
 exposing content, 338–346
 hijacking, 339–340
 negotiating content, 341–342
 response data, 339
 returning, 167

JSON files, 69–70, 126

JSON.NET, 338

JSONP (JSON with Padding), 342–344

jsonpCallback, 344

JsonpResult, 343

JsonRequestBehavior, 339–340

JsonResult, 159, 338, 340–341, 343

JustInMind, 57

K

Kennedy, John F., 247

Kestrel, 115

Kestrel, 122

King, Martin Luther, 103

Knockout, 77, 85
 template libraries, 357

Kotlin, 9

L

lambda code, 117

landscape, 379

languages, extension methods, 9

layered architecture, 65–66, 87, 89, 93
 mapping, 218–219

layouts,
 creating presentation, 228–230
 responsive, 176–183

lead, fonts in RWD, 376

leader of discussion, 18

legacy code, 32, 106

legacy data model, 221–223

LESS, Bootstrap, 172–174

LessTransform, 237

line height, Bootstrap, 376

LINK, 367

LinkedIn,
 on-demand scrolling, 269
 social authentication, 244

LINQ IQueryable, 226

LINQ-to-DataSet, 222–223

LinQ-to-Entities

- LinQ-to-Entities, 38
- Linux, 68
 - DNX runtime environment, 70
- listeners, 41–42
- lists, drill-down views, 274–275
- ListView, paging data, 263–264
- load, Ajax, 355
- locale, 142
- localization, xxxConfig, 222
- logging, 8
- logical groups, 261–263
- Login, 243
 - Facebook authentication, 245
- login forms, 280
 - common forms, 279–283
 - displaying errors, 281–282
 - posting from, 281
 - processing posted data, 281–283
 - system feedback, 283
- LoginInputModel, 91, 129, 219
 - posting from login form, 281
- LoginViewModel, 219
- LoveGermanShepherds, 148

M

- Mac, 68
 - DNX runtime environment, 70
- Main, 122–123
- maintenance operations, tools, 232
- Malcolm X, 381
- managed entry point, 114
- Mandela, Nelson, 337
- Map, 117
- mapping
 - actions to HTTP verbs, 148–150
 - actions to methods, 147–148
 - layers to models, 228
 - of methods, 94
 - model-binding, 153
- MapRoute, 140, 221
- MapWhen, 117
- MapXxx, 117
- Marcotte, Ethan, Responsive Web Design (RWD), 366
- MasterLocationFormats, 162, 229
- master pages, layout, 250
- Match class, 26, 37–39
- matchMedia, 379
- MatchState property, 27
- matrix
 - Bootstrap, 176–177
 - container in Bootstrap, 176–177
- MaxJsonLength, 340
- media, 366
 - LINK, 367
 - print, 366
 - screen, 366
- media queries, 393
 - Bootstrap, 369
 - grid system, 369–371
 - orientation, 378
- media types
 - CSS media queries, 366–367
 - handheld, 366–367
- Memcached, 99
- memory footprint,
 - ASP.NET Core, 106
 - cost of, 110
- Menu, common base class, 248
- Mercator map, 32
- message-based CQRS architecture, 42
- message-based formulation, 39–42
- methods, 25, 95
 - application-layer, 58
 - Configure, 123–124
 - ConfigureServices, 123
 - Get, 144
 - GetHttpHandler, 143
 - Include, 232
 - IncludeDirectory, 232
 - Login, 243
 - LoveGermanShepherds, 148
 - Main, 122–123
 - mapping actions to, 147–148
 - MapRoute, 140
 - MapXxx, 117
 - naming conventions, 6
 - OnConnected, 365
 - OnDisconnected, 365
 - OnReconnected, 365
 - Partial, 256
 - private setters, 27
 - RegisterRoutes, 140
 - Render, 233
 - RenderBody, 253–254
 - RenderPartial, 256
 - RouteConfig, 140
 - Run, 117
 - saga, 42
 - ToString, 168



- methods (*continued*)
 - UseXxx, 117
 - value objects, 26
 - worker-service class, 225
- Meyer, Bertrand, 33
- Microsoft ActiveX. *See* ActiveX
- Microsoft Ajax. *See* Ajax
- Microsoft Application Insights, 241
- Microsoft ASP.NET Identity, 242–244
- Microsoft ASP.NET Web Optimization, 231
 - WebGrease, 236–237
- Microsoft Azure SQL Database. *See* Azure SQL Database
- Microsoft C#, 73
- Microsoft C# compiler, 150
- Microsoft Cordova, 304
- Microsoft Edge, 305
- Microsoft Entity Framework. *See* Entity Framework
- Microsoft Internet Explorer. *See* Internet Explorer
- Microsoft Internet Information Services (IIS). *See under* IIS (Internet Information Services)
- Microsoft Json. *See* JSON
- Microsoft Message Queuing (MSMQ), 346
- Microsoft .NET Framework, 110
 - ASP.NET Core, 66
 - data-access layer, 214
 - JSON data, 338
- Microsoft NuGet. *See* NuGet
- Microsoft Office Excel, 8
- Microsoft OneDrive, 8
- Microsoft ReSharper, 9
- Microsoft Silverlight, 75, 104
- Microsoft SQL Server, 222
 - persistence model, 215
- Microsoft stack,
 - ASP.NET Core, 66
 - ASP.NET MVC, 76–79
 - web solutions, 64–66
- Microsoft Visual Basic 6, 221
- Microsoft Visual Basic user interface, 49
- Microsoft Visual Studio 2015. *See* Visual Studio 2015
- Microsoft Web Essentials, 174
- Microsoft Web Forms. *See* Web Forms
- middleware, 130–131
 - ASP.NET, 117
- minification, 174, 236–237
- mirroring, 18
- mixins, LESS, 172
- mobile applications, 346–350
- mobile content, 392–394
- mobile-first, 373
- mobile-last, 373
- mobile-only-use-case, 384
- mobile sites
 - client-side device detection, 386
 - redirecting to, 393
- mobile web, 90
- mockups, 53
- modal, 297–298
- modal-content, 297
- modal dialog boxes, 171, 276, 297
- modal forms, 296–304
 - configuring, 296–297
 - initializing, 298–299
 - posting, 299–301
 - pros and cons, 303–304
 - tablets, 393
- modal updates, 364
- modal windows,
 - cache setting, 356
 - desktop view, 304
 - improving user experience, 304–311
- @model, 164
- model binders, 152, 225
- model binding, 91, 153–158
 - binding complex types, 156
 - Boolean, 156
 - collections, 157–158
 - default, 153–154
 - optional values, 155–156
- modeling, 18
- modeling space, event storming, 17
- models, 61, 225
 - adding in ASP.NET MVC, 227–228
 - areas of ASP.NET MVC, 220
 - for the business domain, 50
 - classic web, 104
 - different programming, 111
 - persistence, 5–6
- ModelState dictionary, 290
- Model-View-Controller (MVC), 61–62, 134
- Model-View-Presenter (MVP), 61–62
- Model-View-ViewModel (MVVM), 61–62
- @Model.XXX, 164
- Modernizr
 - bundling files, 234–235
 - data-input type, 385
 - date pickers, 305
 - feature detection, 384–386
 - polyfill, 376
 - what it can do, 384–386
- modern webpages, 171

- Mono, 71
- monoliths, 87
- mouse pointer, 393
- Moustache, 85
- m-site, 393
- MSMQ (Microsoft Message Queuing), 346
- multiresolution views, 180–181
- multitenant applications, 223
- mustache.js, 357
 - sample template, 359
- MVC (Model-View-Controller), 61–62, 67–68, 134
- MvcEmuleHandler, 134
- MvcEmule.HomeController, 136
- MVC triad, 61
- MVP (Model-View-Presenter), 61–62
- MVVM (Model-View-ViewModel), 61–62
- m_XXX, 391

N

- name, route, 140
- name attributes, 281
- named pipes, 346
- naming conventions,
 - event, 41
 - ubiquitous language, 6
- native process, 114
- navigator, user-agent sniffing, 386
- NCache, 99
- Neo4j, 231
- .NET CLR, 70
- .NET Core, 67–68, 71, 107, 111
- .NET Execution Environment, 113, 223–224
- .NET Framework, 30, 67–68, 110
 - ADO.NET, 222
 - ASP.NET Core, 66, 70
 - data-access layer, 214
 - definition, 112
 - JSON data, 338
- .NET Version Manager (DNVM), 115
- .NET X-platform, 67–68
- New, 288
- NHibernate, 225, 227
- NonAction, 148
- non-desktop devices, 373–379
- NoSQL, 31
- NoSQL, 223
- NotSupportedException, 143
- NuGet, 115, 119, 121, 231
 - ASP.NET SignalR, 360–361
 - Bootstrap, 174
 - cloud API, 394
 - ELMAH, 241
 - <http://github.com/eternicode/bootstrap-datepicker>, 305–306
 - jQuery Validation, 302
 - JSON.NET, 338
 - LessTransform, 237
 - PagedList, 264
 - paging data, 263–268
 - Typeahead, 307–308
 - WURLF framework, 394
- null, 156
- numbers, input types, 382

O

- OAuth, 244, 349–350
- object models, distinct stacks, 34
- object-oriented domain model, 24–26
- object-oriented paradigm, 95
- Object/Relational Modeling (O/RM), 31
- obsolescence, 106
- OnActionExecuted, 295
- OnActionExecuting, 295
- OnConnected, 365
- OnDisconnected, 365
- OnException, 238
- online users, counting, 365
- onreadystatechange, 352
- OnReconnected, 365
- Open Web Interface for .NET (OWIN), 67, 112
- Opera
 - date pickers, 305
 - PICTURE, 376
- optimization, 109
 - bundling, 232–233
- optional values, model binding, 155–156
- OR, CSS 3, 367–368
- OrderController, 93
- OrderCreated, 17, 41
- OrderDetails, 28–29
- orderers, BundleCollection, 234–235
- orderId, 144
- OrderItem, 29
- OrderModule, 93
- OrderRepository, 31, 93
- Orders, 28
- OrderService, 93
- orientation, 368–369, 378
 - Bootstrap, 379
 - changes, 379

origin, 345
 O/RM (Object/Relational Modeling), 31, 37, 223
 O/RM helper object, 224
 output caching, 280
 OWIN (Open Web Interface for .NET), 67–68, 78,
 112, 128
 ASP.NET SignalR, 360–361

P

package diagnostics, 123
 package.json, 121
 packages, 124
 packages.config, 119
 page-agnostic URL, 136
 PagedList, 264–265
 page layout
 in Bootstrap, 179–180
 examining, 250–253
 page loading, placing scripts for speed, 252
 Paginator, 267
 paging data, 263–268
 Ajax, 266–267
 caching, 266
 Guriddo jqGrid, 263–264
 Html.PagedListPager, 265
 selecting a helper package, 263–264
 Telerik, 264
 URL-based, 264–266
 parameter binding, manual, 152–153
 parameters, catch-all, 143
 Partial, 167, 256
 partial view, 167, 228–229, 255–256
 grid view, 258–259
 passing data to, 256
 Razor, 229
 PartialViewLocationFormats, 162, 229
 PartialViewResult, 159
 partner relationship, 16
 Pascal (Wirth, Niklaus), 48
 passive users, 51
 password hashing service, 243
 pathinfo, 143
 patterns
 business logic, 22–24
 Domain Model, 22–24
 Model-View-Controller (MVC), 61–62, 134
 Model-View-Presenter (MVP), 61–62
 Model-View-ViewModel (MVVM), 61–62
 Post-Redirect-Get pattern (PRG), 284–286
 Repository pattern, 227–229
 Table Module, 22–24
 Transaction Script, 22–24
 PaymentCompleted, 41
 PayPal, WURFL framework, 387
 pc_NN, 391
 P.CSS, 376
 performance, event replay, 45
 persistence, 5, 92
 ADO.NET., 222
 aggregates, 30
 database segments, 225–226
 domain logic, 22
 domain model, 95, 97
 Domain Model, 23
 entities, 25
 Entity Framework Code First, 95
 events, 43–44
 event sourcing, 98
 event store, 44
 infrastructure layer, 97
 mapping ASP.NET MVC, 219
 Match example, 37
 repositories, 31
 Table Module, 23
 persistence layer, 220, 224, 228
 designing, 220–229
 domain model, 216
 modeling the business domain, 223
 Repository pattern, 227–229
 persistence model, 214–215, 220, 227–228
 persistent store, 126
 personas, 52
 per-status code views, 240
 physical files, requests, 142–143
 PICTURE, 375, 390
 Android, 376
 Chrome, 376
 Firefox, 376
 hidden costs, 376
 Opera, 376
 pilot, 54
 pixels
 Bootstrap, 378
 font size, 376–378
 placeholders, URL parameter, 139
 plain ASP.NET, 105
 plain stored procedures, 31
 plain text dates, 307
 planning projects, 217–230

plugins

- plugins,
 - date-picker, 385
 - Modernizr, 305
- PoC (proof of concept), 53
- pointer, CSS media queries level 4 standard, 368
- polyfill, Modernizr, 376
- polyglot persistence, 222, 230–233
 - canonical example, 231
 - costs, 231
 - customer support, 231–232
 - tools comparison, 232
 - variegated information, 230
- popovers, 274
 - enabling, 272
 - linking in Bootstrap, 175
 - setting content, 272–273
- popover view, 271–274
- popups, tablets, 393
- portrait orientation, 379
- position CSS, 276
- \$.post, Ajax, 355
- Post-Redirect-Get pattern (PRG), 284–286
- PostResolveRequestCache, 138
- POSTs, 138, 285
 - controller methods, 295
 - HTTP requests, 351–352
 - login form, 280
 - modal input form, 301
- presentation, 48, 218–219
 - layouts, 228–230
- presentation layer, 30, 87, 90–92
 - controller class, 146
 - data model, 220
- Presentation Model, 61
- presentation screens, 90
 - input model, 218
- PRG (Post-Redirect-Get pattern), 284–286
- primitive types, 26
 - binding, 154–155
- principal, 349
- print, 366
- privileged access, 30
- productid, 142
- program exceptions, 238–239
- programming interface, task-oriented, 229
- ProgressHub, 362
- progressive enhancement, 373
- projections, 43
 - event store, 44
- project.json, 121–122

- proof of concept (PoC), 389
- proof of concept (PoC), 53
- properties, 25, 95
 - naming conventions, 6
- prototypes, 53–54
 - turning views into, 57
- pulling content, 351–359
- pull-right class, 181
- push notifications, 359
- PUTs, 138

Q

- queries, 30
 - event sourcing, 98
 - event store, 44
- %QUERY, 308
- query stack, 219
- QueryString, 152–153, 284

R

- Range, 287
- RavenDB, 231–232
- Raygun, 241
- Razor, 74, 118, 125, 161
 - ASP.NET virtual path provider, 161–163
 - C# instructions in, 166
 - code snippets, 164–167
 - default location formats, 162
 - horizontal scrolling, 268
 - ImageEngine, 391
 - login form, 280
 - partial views, 255–256
 - referencing CSS bundle, 233
 - sections, 254
 - template libraries, 357–359
 - view engine, 161–163, 228–229
 - view model, 247–250
 - VirtualPathProviderViewEngine, 229
 - Visual Basic instructions in, 166
- RazorViewEngine, 229
- RDBMS (relational database management system), 214
- React, 77, 104
- ReadDatabase root object, 39
- read model, sample, 38–39
- read stack,
 - Match example, 37–39
 - message-based formulation, 39–42
 - repository classes, 228

- ready handler, client-side validation, 302
- readyState, 352
- Recordset, 222
- Recovery model, simple, full, 233
- RecursionLimit, 340
- RedirectResult, 159
- RedirectToAction, 282
- RedirectToRouteResult, 159
- refactoring tools, 9
- Refresh, 284
- RegisterDisplayModes, 398
- RegisterRoutes, 140
- RegularExpression, 287
- relational database management system (RDBMS), 214
- relational databases, 223
 - persistence model, 215
 - polyglot persistence, 230
- relational data stores, 50
- REM, Bootstrap 4, 378
- Remote, 287
- remote procedure calls (RPCs), 78–79, 98
- remote tasks, monitoring, 361–364
- REM units, font size, 377
- Render, 233
- render actions, 257–258
- RenderBody, page layout, 253
- @RenderBody, 164
- rendering,
 - flexible, 182
 - screen-based, 178–183
- RenderPartial, 256
- RenderSection, 254
- RepeatText, 156
- replay of events, 45
- repositories, 25, 31, 96–97, 227–229
 - data model, 220
 - distinct stacks, 34
 - implementing, 229
- repository classes, 228
- Repository pattern, 227–229
- Representational State Transfer (REST), 138
- RequestContext, 142
- Request.Params, 152
- requests, 152–153
 - mapping to a controller method, 153–154
 - physical files, 142
 - routing incoming, 134–145
- Required, 287
- RequireJS, 253
- ResetAll, 235
- ReSharper, 9
- resize, events, 379
- resolution, CSS media queries level 4 standard, 368
- resources,
 - serving more effectively, 231–237
 - using in web applications, 228
- responseText, 352
- responsiveness, 365
 - responsive HTML templates, 392
 - responsive images, 374–376
 - responsive layouts, 176–183
 - responsive pages, 388–389
- Responsive Web Design (RWD), 176
 - adapting to non-desktop devices, 373–379
 - adaptive, 365
 - Bootstrap, 366
 - dealing with images, 374–376
 - device independence, 371–373
 - feature detection, 384–386
 - fonts, 376–378
 - foundation, 365–373
 - history, 366
 - Marcotte, Ethan, 366
 - mobile-first, 373
 - mobile-last, 373
 - orientation, 378
 - paradox, 372
 - responsiveness, 365
 - screen size, 369
- REST (Representational State Transfer), 78, 138
 - starter kit, 346
- RESTful, 346
- return on investment (ROI), 61
- roles, 8
- Route, 83, 144, 221
- RouteArea, 144
- RouteCollection, 142–143
- RouteConfig, 140, 221
- RouteData, 153
- RouteData.Values, 153
- route exceptions, 239–240
 - search engine optimization (SEO), 240
- RouteExistingFiles, 142–143
- route handlers
 - introducing, 142
 - IRouteHandler, 142
- route not found, 238
- RoutePrefix, 144
- routes
 - application, 138–145
 - configuration, 222

routes

- routes (*continued*)
 - defining application, 139–141
 - global.asax file, 139, 141
 - input data, 153
 - input forms, 284
 - locale, 142
 - matching, 141
 - processing, 141
 - productid, 142
 - registering in ASP.NET MVC, 221
 - URL routing HTTP module, 137–138
 - RouteTable, 221
 - RouteTable.Routes, 140
 - routing, 137–138
 - attribute-based, 143
 - enabling attribute, 144
 - MVC (Model-View-Controller), 134
 - preventing, 143
 - Rowling, J. K., 279
 - rows, Bootstrap, 177–178
 - RPCs (remote procedure calls), 98
 - Run, 117
 - runtime
 - ASP.NET Core, 106–107, 113–118
 - ASP.NET Core 1.0, 346
 - ASP.NET MVC (Model-View-Controller), 134–137
 - MVC (Model-View-Controller), 134–137
 - Web API, 80, 347
 - runtime pipeline, 67
- ## S
- Safari
 - date pickers, 305
 - device independence, 371
 - input types, 383
 - sagas, 41–42
 - Same-Origin Policy, 342
 - Save button, 310
 - scalability, 60
 - ScaleOut, 99
 - schemas, 126
 - fluid grid in Bootstrap, 176–177
 - login forms, 281
 - screen-based rendering, 179–180
 - screen orientation, 368–369
 - screens, 55–57, 60, 90, 366
 - screen size,
 - breakpoints, 179–180
 - conditional style sheets, 368–369
 - RWD, 369
 - screen-based rendering, 179–180
 - script-based custom polyfills, 383
 - ScriptBundle, 236–237
 - SCRIPT element, 342
 - script files
 - bundling, 233–234
 - in a web application, 228
 - scripting
 - CSS media queries level 4 standard, 368
 - placing, 252–253
 - scrolling
 - adding to webpage, 268–271
 - horizontal, 268–269
 - on-demand, 269–271
 - search engine optimization (SEO)
 - per-status code views, 240
 - route exceptions, 240
 - sections, page layout, 254–255
 - security,
 - HTTP 404 error, 239
 - Web API, 348
 - segmented option buttons, 171
 - send, HTTP requests, 351–352
 - SEO (search engine optimization), 240
 - separation of concerns (SoC), 87, 146, 225
 - serialization, 300, 347
 - server controls, 73
 - server-side approaches, 92
 - server-side detection, 394–399
 - server-side preprocessing, 174
 - ServerVariables, 152–153
 - service buses,
 - xxxConfig, 222
 - services,
 - adding, 125
 - data model, 220
 - Session, NHibernate, 225
 - SetMatchState method, 27
 - Shakespeare, William, 365
 - Shared folder,
 - partial view, 228–229, 256
 - Views, 250
 - shared kernel, 13, 16
 - shell script, 114
 - show events, 298–299
 - show/hide, 372
 - Shrink database, 232
 - Shrink transaction log, 232
 - SignalR, 118, 364
 - ASP.NET, 104

- SignalR (*continued*)
 - connection ID, 361
 - refreshing view, 364
 - significant entities, 229
 - Silverlight, 75, 104
 - Simple Object Access Protocol (SOAP), 346
 - simple query language, 367–368
 - single-page applications (SPAs), 64, 75, 83–85, 104
 - popovers, 273
 - weak points, 85
 - singleton services, 125
 - site icons, 252
 - sketches, 53
 - small fonts in RWD, 376
 - smartphones,
 - creating mobile sites, 393
 - HTML5, 382
 - Responsive Web Design (RWD), 366
 - snapshots, 99
 - snippets, 167
 - SOAP (Simple Object Access Protocol), 346
 - SoC (separation of concerns), 146, 225
 - social authentication, 244–245
 - social networks, polyglot persistence, 230
 - software architects, 3, 51–52
 - software layers, 87
 - software models
 - for business domain, 50
 - object-oriented domain model, 24–26
 - Solution Explorer, 118–119
 - sources, 375
 - span4_*, 370
 - spans, 370
 - SPAs (single-page applications), 64, 75, 83–85, 104
 - popovers, 273
 - weak points, 85
 - sqlcmd, 232
 - SQL data stores, 231
 - SQL queries, 44
 - SQL Server, 215, 222
 - comparison of tools, 232
 - SQL Server Management Studio, 232
 - SQL Server Profiler, 232
 - srcset, 375
 - StackOverflow, 286
 - Start method, 37
 - Start method, 27–28
 - startup, 116, 131, 223–224
 - Code First, 226–227
 - Main, 122–123
 - startup.cs, 360–361
 - statelessness, 146
 - status codes, 352–353
 - StopRoutingHandler, 143
 - storage, planning architecture, 65
 - storyboards, 55–57
 - strategic design, 5, 18
 - StringLength, 287
 - String/Object dictionary, RouteData.Values, 153
 - String types, 25
 - StyleBundle, 236–237
 - (RPC)-style HTTP services, Web API, 346
 - subdomains, 10–11
 - submitHandler, 302
 - supporting architecture, 24
 - swipe, 268
 - synchronization, 53
 - syntax, 134
 - system.web, 67–68, 110
 - System.Web.Extensions.dll, 338
 - System.Web.Routing, 142
- ## T
- Table Module, 23
 - tablets,
 - HTML5, 382
 - modal forms, 393
 - popups, 393
 - Responsive Web Design (RWD), 366
 - tab strips, 171
 - tactical design, 5, 18
 - tag helpers, 254
 - task-oriented programming interface, 229
 - tasks,
 - monitoring remote, 361–364
 - perform with action methods, 151
 - from prototype, 57–58
 - TCP, 346
 - Team Foundation Server, 9
 - tel, input field, 382–383
 - Telerik, 264
 - TempData,
 - login errors, 282
 - Post-Redirect-Get pattern (PRG), 285–286
 - TempData dictionary, 295
 - template libraries,
 - JavaScript, 357–359
 - Knockout, 357
 - mustache.js, 357
 - testable code, 225
 - text boxes, 309–310

three-tier architecture

- three-tier architecture, 65, 87–89
- tilde conversion, 251
- tiles, rendering data, 260–261
- time, new input types, 382
- toggle facility, popover, 272
- tokens, access, 349
- tooltips, 175
- top-down approach, 48–52
 - UX, 51
- Torvalds, Linus, 47
- ToString method, 168
- touch-based devices, 393
- Transaction Script, 22
- transformers, custom, 237
- triggers, 296
- true, cross-property validation, 292
- T-SQL statements, 146
- Twain, Mark, 214
- Twitter
 - Bootstrap, 77, 175
 - OAuth, 349–350
 - social authentication, 244
- two-pizza rule, 17
- two-tier schema, 75
- Typeahead, 307–308
 - Bloodhound, 308
- types, 306

U

- ubiquitous language, 4, 218
 - acronyms, 10
 - bounded context, 10–14
 - choosing terms, 7–8
 - constituent elements of, 7
 - extension methods, 9
 - and international teams, 9
 - mockup, 53
 - naming conventions, 6
 - reflecting in code, 8–9
 - sketch, 53
 - wireframe, 53
- UI (user interface), 49
- Unit-of-Work pattern, 225
- Universal Windows applications, 62
- updateProgressBar, 363
- upstream context, 15
- url, input field, 382–383
- @Url.Content, 164
- URL parameters, 138–139
 - ImageEngine, 391

- URL patterns
 - route, 140
 - and routes, 138–139
- URL routing HTTP module, 137–138
- URLs
 - defining syntax of, 134
 - IMG element, 374
- usability review, 52, 54
- UseExceptionHandler, 117
- user-agent sniffing, 386
- user authentication,
 - comparing ways, 242–244
 - configuring, 241
 - Microsoft ASP.NET Identity, 242–244
- user experience (UX), 49, 90–91, 94, 337
 - architecture, 52–59
 - demo, 54
 - improving, 304–311
 - pilot, 54
 - prioritization of features, 55
 - prototype, 53–54
 - synchronization, 53
 - top-down approach, 51
 - UX-Driven Design, 47
- user interface (UI), 49
 - granularity, 146
 - presentation layer, 90
 - updating in real time, 363–364
 - Visual Basic for, 49
- user permission, geolocation, 384
- user preferences, 231
- users, 349
 - detecting authenticated, 129
- UseStaticFiles, 117
- UseXxx, 117
- UXDD (UX-Driven Design), 47
 - benefits, 59–62
 - diagram, 60–61
 - diagram of three steps, 55
 - layout, 59
 - list of tools, 56
- UXPin, 56

V

- validate step, 9
- ValidationAttribute, 287
- validation messages, 291–292
- validation process, 286–295
- validationSummary, 302
- value types, 25–26, 29



- variables, LESS, 171
 - VH, viewport units, 377
 - ViewBag, 92, 165
 - ViewData, 92
 - view engines, 92, 228–229
 - custom, 229–230
 - invoking, 163
 - structure, 161
 - viewers, 275–276
 - ViewLocationFormats, 163, 229
 - View method, 163
 - View-Model, 225
 - ViewModelBase, 253
 - view models, 90, 92, 219–220, 227–228
 - data model, 220
 - exploring, 247–250
 - instances, 249
 - worker-service method, 249
 - viewports
 - Bootstrap, 174
 - Bootstrap grid system, 176–178
 - HEAD section, 251
 - viewport units, 377
 - VH, 377
 - VMAX, 377
 - VMIN, 377
 - VW, 377
 - ViewResult, 159, 163
 - ViewResultBase, 159
 - views, 61, 125, 225
 - adapting to devices, 381–389
 - adding master/detail, 271–276
 - areas, 145
 - areas of ASP.NET MVC, 220
 - ASP.NET MVC, 217
 - ASP.NET virtual path provider, 161–163
 - drill-down, 274–276
 - error handling, 238–241
 - HTML helpers, 254
 - image-resizing tool, 390
 - page layout, 250
 - partial views., 167
 - Post-Redirect-Get pattern (PRG), 285–286
 - presenting elements, 254–258
 - refreshing after modal update, 364
 - routing based on detected device, 397–398
 - tag helpers, 254
 - URL routing HTTP module, 137–138
 - Views folder, 230
 - viewstate, 76
 - virtual measurements, screen-based rendering, 179–180
 - VirtualPathProviderViewEngine, 229
 - visible-xx, 181
 - Visual Basic, 73, 221
 - in Razor, 166
 - user interface, 49
 - Visual Studio, 64, 118
 - areas of ASP.NET MVC, 221
 - error handling, 238
 - Gulp file, 120–121
 - LESS, 174
 - page layout, 251
 - partial views, 255–256
 - Visual Studio 2015, 64, 118
 - ASP.NET Core template, 128
 - VMAX, viewport units, 377
 - VMIN, viewport units, 377
 - VW, viewport units, 377
- ## W
- W3C (Worldwide Web Consortium), 366
 - WCF (Windows Communication Foundation), 79–80
 - Web APIs, 21–22, 67–68, 118
 - ASP.NET Core, 82
 - ASP.NET MVC, 347–348
 - designing, 346–350
 - security, 348–351
 - standalone, 348
 - xxxConfig, 222
 - WebApplication, 123
 - web.config file
 - defining syntax of URLs, 134
 - login page, 279–281
 - Web Essentials, 174
 - web farms, Post-Redirect-Get pattern (PRG), 286
 - web flavors, 103–105
 - Web Forms, 64, 67–68, 72–75, 105, 118, 130
 - controller, 146
 - differences from ASP.NET MVC, 133
 - good points, 73–74
 - login forms, 281–282
 - page-agnostic URLs, 136
 - page layouts, 253
 - paging data, 263–264
 - partial views, 167, 255–256
 - rendering data as tiles, 260–261
 - view engines, 161
 - Web Forms ASPX, exposing JSON content, 338
 - WebGrease, 236–237

webHttpBinding

- webHttpBinding, 346
- Web Pages, 104, 118
- web programming, 129–132
- webroot folder, 119
- web services
 - caching, 99
 - front ends, 79
 - hosting, 82
- website icons, 252
- website resources
 - <http://caniuse.com> website, 305–307, 384–386
 - <http://detectmobilebrowsers.com>, 386
 - <http://github.com/eternicode/bootstrap-datepicker>, 305
 - <http://haacked.com/archive/2009/06/25/json-hijacking.aspx>, 339
 - <http://igrigorik.github.io/http-client-hints>, 389
 - <http://knockoutjs.com>, 357
 - <http://modernizr.com>, 385
 - <http://scottjehl.github.io/picturefill>, 376
 - https://developer.mozilla.org/en-US/docs/Web/HTTP/Access_control_CORS, 346
 - <https://github.com/janl/mustache.js>, 357
 - <http://web.wurfl.io>, 376, 387–388, 392
 - <http://wurfl.sourceforge.net>, 395
 - <http://www.expoware.org/wit.html>, 375
 - <http://www.expoware.org/wjs.htm>, 388
 - <http://www.json.org>, 338
 - <http://www.newtonsoft.com/json>, 338
 - <http://www.quirksmode.org/js/detect.html>, 386
 - <http://www.scientiamobile.com>, 388, 395
 - <http://www.w3.org/TR/css3-mediaqueries>, 368
- web solutions, 64–66
- WFC (Windows Communication Foundation), 79–80, 346
- what-if scenarios, 45
- widgets, reusable alerts, 294
- width,
 - CSS 3 media queries, 367
 - IMG element, 374
- wiki, 8
- windows, 379
 - Web API, 347
- Windows CE devices, Responsive Web Design (RWD), 366
- Windows Communication Foundation (WCF), 79–80, 346
- wireframes, 53–54, 56, 60
- Wirify, 57
- Wirth, Niklaus, 48
- w_NNN, 391
- worker-service classes, 225–227
 - placement, 227
- worker-service methods, 249
- workflow
 - from prototype, 57–58
 - saga, 42
- Worldwide Web Consortium (W3C), 366
- wrappers, 302
- wrapping results, action method, 158–160
- WS-* protocols, 346
- WURFL, 394–395
 - capabilities, 395
 - cloud API, 395–397
 - cloud user dashboard, 396
 - framework, 387
 - NuGet, 394
 - on-premises API, 394
 - server-side detection, 394
- WURFL.JS, 393
 - client-side detection, 387–388
 - properties, 387
 - test page, 388
- WURFL server, 387
- WurflService class, 396
- wwwroot folder, 119, 121

X

- XAML-based applications, 62
- XML, 126
- XML .browser files, 392
- XML formatter, 341
- XMLHttpRequests, 345, 351–352
 - pulling content, 351
- XML serializers, 342
- XS devices, Bootstrap columns and rows, 178
- xxxConfig, 222
- xxxFor, 291

Y


- Young, Greg, 19
- YourApp.MvcApplication, 220



About the author

DINO ESPOSITO is CTO and co-founder of Crionet, a startup providing software and IT services to professional tennis and sports companies. Dino still does a lot of training and consulting and is the author of several other books on web and mobile development. His most recent book is *Architecting Applications for the Enterprise, Second Edition*, written along with Andrea Saltarello. A Pluralsight author, Dino speaks regularly at industry conferences and community events. You can follow Dino on Twitter at @despos and through his blog at <http://software2cents.wordpress.com>.



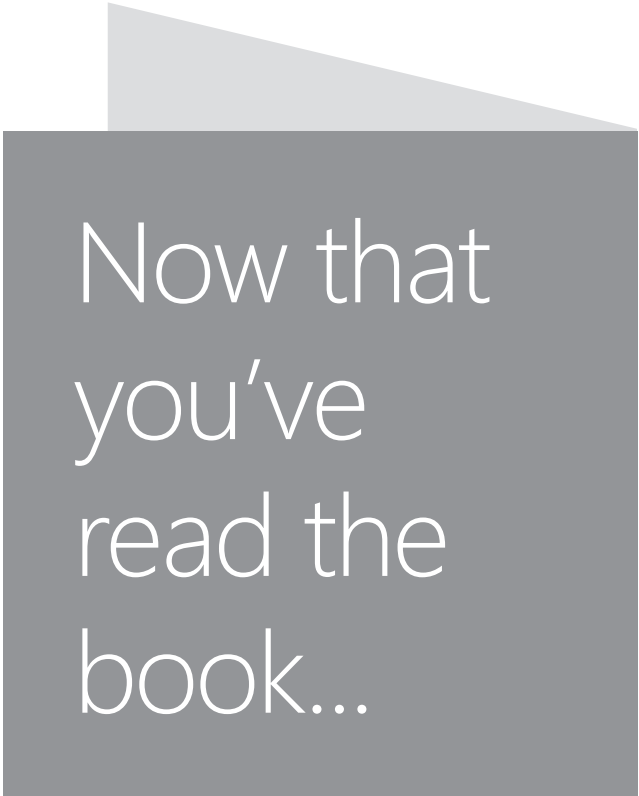

Now that
you've
read the
book...

Tell us what you think!

Was it useful?

Did it teach you what you wanted to learn?

Was there room for improvement?

Let us know at <http://aka.ms/tellpress>

Your feedback goes directly to the staff at Microsoft Press,
and we read every one of your responses. Thanks in advance!

